

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 120 258 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
17.05.2006 Bulletin 2006/20

(51) Int Cl.:
B41J 2/175 (2006.01)

(21) Application number: **01101145.9**

(22) Date of filing: **22.01.2001**

(54) **Ink cartridge, and ink-jet recording apparatus using the same**

Tintenpatrone und Tintenstrahldruckvorrichtung mit einer derartigen Tintenpatrone

Cassette d'encre et appareil d'enregistrement par jet d'encre l'utilisant

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

• **Kamijyo, Masanori**
Suwa-shi,
Nagano-ken 392-8502 (JP)

(30) Priority: **21.01.2000 JP 2000012461**
21.01.2000 JP 2000012462
31.01.2000 JP 2000021020
01.02.2000 JP 2000024419
21.06.2000 JP 2000186050
04.07.2000 JP 2000201983

(74) Representative: **HOFFMANN EITLE**
Patent- und Rechtsanwälte
Arabellastrasse 4
81925 München (DE)

(43) Date of publication of application:
01.08.2001 Bulletin 2001/31

(56) References cited:

EP-A- 0 604 127	EP-A- 0 778 145
EP-A- 0 827 836	EP-A- 0 894 630
EP-A- 0 927 638	EP-A- 0 928 694
EP-A- 0 947 328	EP-A- 0 985 451
US-A- 5 505 339	US-A- 5 541 632
US-A- 5 793 387	US-A- 5 852 459
US-A- 5 912 688	US-A- 6 010 210
US-A- 6 012 807	

(73) Proprietor: **SEIKO EPSON CORPORATION**
Shinjuku-ku,
Tokyo 163-0811 (JP)

(72) Inventors:

- **Ishizawa, Taku**
Suwa-shi,
Nagano-ken 392-8502 (JP)
- **Kumagai, Toshio**
Suwa-shi,
Nagano-ken 392-8502 (JP)

- **PATENT ABSTRACTS OF JAPAN vol. 1998, no. 10, 31 August 1998 (1998-08-31) & JP 10 138506 A (SEIKO EPSON CORP), 26 May 1998 (1998-05-26)**
- **PATENT ABSTRACTS OF JAPAN vol. 012, no. 400 (M-756), 24 October 1988 (1988-10-24) & JP 63 145038 A (NEC CORP), 17 June 1988 (1988-06-17)**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 120 258 B1

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The present invention relates to an ink cartridge which is to be used with an ink-jet recording apparatus and is constructed so as to feed ink to a recording head. The present invention also relates to an ink-jet recording apparatus using the ink cartridge.

2. Description of the Related Art

[0002] An ink-jet recording apparatus produces comparatively low noise during printing operation and can form small dots at high density. Hence, the ink-jet recording apparatus has recently been used in a number of printing applications, including color printing.

[0003] Such an ink-jet recording apparatus is usually equipped with an ink-jet recording head which is mounted on a carriage and moved in the widthwise direction of recording paper, and paper feed means for moving the recording paper in the direction orthogonal to the traveling direction of the recording head. On the basis of print data, ink droplets are ejected from the recording head, thus recording the data on the recording paper.

[0004] The recording head is mounted on the carriage, and is capable of ejecting ink droplets of, for example, black, yellow, cyan, and magenta. Accordingly, the ink-jet recording apparatus enables full-color printing by changing the proportions of ink types, as well as effecting text printing with black ink.

[0005] Incidentally, in order to effect a comparatively-high volume of printing, a recording apparatus of this type supplied for, for example, an office or business purpose, requires use of high-volume ink cartridges. To this end, there has been provided a recording apparatus, in which ink cartridges are fitted to a cartridge holder provided, for example, to an apparatus main body.

[0006] In the recording apparatus, sub-tanks are disposed on the carriage having the recording head, and the respective sub-tanks are replenished with ink from corresponding ink cartridges by way of ink supply tubes. The sub-tanks, in turn, supply ink to the recording head.

[0007] Recently, growing demand exists for a large-size recording apparatus capable of effecting printing on larger-size paper, in which a carriage travels a longer scan distance. In order to improve throughput of such a recording apparatus, a larger number of nozzles are provided in a recording head.

[0008] Further, demand exists for a recording apparatus which sequentially supplies ink to the respective sub-tanks mounted on the carriage from corresponding ink cartridges while performing printing operation, in order to improve throughput, and which stably supplies ink from the respective sub-tanks to the recording head.

[0009] In such a recording apparatus, since the car-

riage travels over a longer scan distance, the lengths of respective ink supply tubes inevitably increase. Further, as mentioned above, a larger number of nozzles are provided in the recording head. Hence, such a recording apparatus encounters a technical problem of deficient ink supply to the sub-tanks because the recording head consumes a large quantity of ink, and an increase in the dynamic pressure (i.e., pressure loss) of ink is likely to occur within each of the ink supply tubes interconnecting the ink cartridges and the sub-tanks.

[0010] As one measure to prevent this technical problem, there may be employed, for example, a construction in which air pressure is applied to the ink cartridges to forcibly inducing ink flows from the ink cartridges to the sub-tanks under air pressure. This construction makes it possible to supply a sufficient amount of ink to the sub-tanks.

[0011] Fig. 36 is a cross-sectional view showing an example construction of a related-art ink cartridge utilized for such an ink-jet recording apparatus. In FIG. 36, reference numeral 81 designates a case defining the outer shell of an ink cartridge. The case 81 is integrally formed, into a shape of a bottle having a relatively large opening, from synthetic resin material by means of blow molding (hollow molding).

[0012] A columnar cap member 84 is fitted into an opening section 82 by way of an O-ring 83. By means of the cap member 84 and the O-ring 83, the inside of the case 81 is sealed, thus constituting a pressure chamber 85 within the case 81.

[0013] An ink outlet section 86 employing a ball valve is formed in the center of the columnar cap member 84. Ink can be led out from an ink pack 87 - which is housed in the case 81 and formed from ink-filled flexible material - to the outside via the ink outlet section 86.

[0014] An air inlet port 89 is formed in a portion of the cap member 84. A rubber plug 88 is fitted on the air inlet port 89. A through hole 88a is formed in the center of the rubber plug 88. When the ink cartridge is not attached to an ink-jet recording apparatus, the through hole 88a is closed.

[0015] When the ink cartridge is attached to the recording apparatus, an unillustrated hollow needle provided on the recording apparatus penetrates through the through hole 88a of the rubber plug 88, and pressurized air can enter the pressure chamber 85 by way of the hollow needle.

[0016] Consequently, the pressurized air is introduced into the pressure chamber 85 by way of the hollow needle. Upon receipt of pressure, the ink contained in the ink pack 87 is led to the outside by way of the ink outlet section 86.

[0017] The above ink cartridge of related-art construction involves several problems to be solved, as described below.

[0018] A first problem is as follows: In the ink cartridge of the related-art construction mentioned above, the case forming the outer shell is integrally formed by blow mold-

ing, and consequently, as can be seen from the exemplified construction shown in Fig. 36, the ink pack 87 is integrally attached to the columnar cap member 84 formed with the ink replenishing valve 86 and the air introducing valve 88.

[0019] The cap member 84 is pressure-fitted to the opening section 82 using the O-ring 83 so that the ink pack 87, which has not been filled with ink, is inserted into the case 81. Subsequently, ink is injected into the ink pack 87 from the exterior via the ink replenishing valve 86 to thereby complete a product, i.e. the ink cartridge.

[0020] Since the case defining the outer shell of the ink cartridge of related-art construction is integrally formed by blow molding, difficulty is often encountered in assembling an ink pack, which has already filled with ink, into the case. That is, the ink pack must be filled with ink in a subsequent process.

[0021] Further, predetermined pressure is imposed on the inside of the case during the recording operation of the recording apparatus. There must be employed a countermeasure for preventing deformation of the case, which would otherwise be caused when the case receives the pressure. For this reason, in order to ensure the strength of the case, adoption of a simple construction, such as a cylindrical shape like a bottle having a relatively large opening section as shown in Fig. 36, is preferable.

[0022] However, such an outer shell yields a problem of an increase in the occupation volume of the case, resulting in difficulty in designing the layout of a recording apparatus of this type, which requires parallel arrangement of color ink cartridges.

[0023] Another conceivable measure for ensuring the strength of the case is to increase the thickness of the case. However, a large quantity of synthetic resin material is consumed for forming a case, thus posing difficulty in contributing to conservation of resources.

[0024] In contrast, another conceivable measure for reducing the quantity of synthetic resin material consumed is to integrally form reinforcement ribs on a part of the case. However, as mentioned above, when blow molding is employed for forming a case, forming reinforcement ribs in the interior of the case is usually difficult.

[0025] A second problem is that, in a case where ink cartridges of related-art construction attached to a recording apparatus are removed from the recording apparatus after having performed ink supply operation, the through hole 88a formed in the rubber plug 88 is closed immediately due to elasticity of rubber, thereby leaving pressurized air within the pressure chamber 85.

[0026] The pressurized air remaining in the pressure chamber 85 continues pressurizing the ink pack 87.

[0027] If the ball constituting the ink outlet section 86 is pushed unintentionally or intentionally through use of, for example, a pen tip or similar implement, the ink contained in the ink pack 87 gushes forth, thereby soiling the surrounding areas.

[0028] Another problem is that ink may leak out from

the ink outlet section 86 even when the pushing action is not performed.

[0029] In order to prevent occurrence of such problems, there must be taken measures for actively letting the air pressure escape from the inside of the pressure chamber 85, by inserting a hollow needle, such as an injection needle, into the through hole 88a of the rubber plug 88 when the ink cartridge is removed from the recording apparatus.

[0030] However, such an operation for releasing pressure is cumbersome for the user, and this is not the reliable countermeasure in practice.

[0031] Even when the ink cartridge of related-art construction is stored without being attached to the recording apparatus, the ambient temperature change of the location where the ink cartridge is stored, particularly, the ambient temperature increase causes the internal atmospheric pressure of the pressure chamber 85 to increase. Accordingly, ink leaks out from the ink outlet section 86.

[0032] A natural approach is to construct an ink cartridge which supplies ink by introducing pressurized air into a case, such that the inside of the case is held hermetic over a long period of time during actual use of the ink cartridge. In addition, consideration of ease of assembly and ease of disassembly and recycling is particularly important. Fulfillment of these requirements is sought strongly.

[0033] When primarily text data are to be printed, the ink-jet recording apparatus utilizing the ink cartridge of such construction employs black ink, as is well known. When color printing is to be effected, color inks, such as yellow ink, magenta ink, and cyan ink, are used.

[0034] As set forth, the ink is available while an ink pack formed from flexible material in the form of a bag is filled with ink and the ink pack is housed in a cartridge case defining the outer shell of the ink cartridge. The ink cartridges are formed so as to assume substantially identical outer shapes. Further, the ink cartridges are filled with substantially-identical amounts of ink.

[0035] In a case where the majority of printed matter to be produced by a recording apparatus is, for example, text data, the amount of color ink used and the frequency of use of color ink are low. Hence, the color ink cartridges will become empty considerably later than will a black ink cartridge.

[0036] For this reason, expiration dates of color ink arrive before the color ink cartridges become empty, thus involving replacement of the ink cartridges with new ink cartridges.

[0037] Conversely, when the recording apparatus is used for printing a large number of color images, the amount of black ink used and the frequency of use of black ink are low. The black ink cartridge will become empty much later than will the color ink cartridges. Hence, the expiration date of black ink arrives while black ink still remains in the cartridge.

[0038] Thus, in addition to a problem of imposing run-

ning costs on the user, there arises another problem of a load of disposing of a considerable amount of ink remaining in an ink cartridge which itself is to be disposed of.

[0039] A conceivable measure for diminishing running costs and the load of disposing of ink is to provide an ink cartridge filled with a smaller amount of ink. In this case, there may be adopted regulation means for diminishing the amount of ink contained in an ink pack.

[0040] For convenience of attaching a cartridge into a holder of a recording apparatus, the outer shell of an ink cartridge case for housing an ink pack must be of a certain size and shape, regardless of the volume of ink. In an ink cartridge filled with a smaller amount of ink, a large gap arises between the cartridge case and the ink pack.

[0041] For example, in the event that an ink pack is freely moved within the cartridge case because of vibration stemming from transport of an ink cartridge; particularly, in the event that the ink pack has experienced excessive physical shock, the ink pack will be broken.

[0042] Another conceivable measure to prevent breakage of an ink pack is to make the outer dimensions of cartridge cases identical and to change the internal size and shape of the case in accordance with the amount of ink to be contained. In a case where an attempt is made to adopt such a measure, metal molds to be used for molding ink cartridge cases must be prepared separately for a high-volume ink cartridge and for a low-volume ink cartridge, and costs of the metal molds are reflected in manufacturing costs.

[0043] In connection with a recording apparatus which is constructed so as to push ink from an ink cartridge by means of pressurized air and which enables selective use of high-volume ink packs and low-volume ink packs, when low-volume ink cartridges are used, a large amount of pressurized air must be introduced into the cartridge cases.

[0044] Consequently, for example, when an attempt is made to activate the recording apparatus by turning on the operating power of the recording apparatus, consumption of a considerable amount of time is required before the recording apparatus becomes able to print, thereby deteriorating the throughput of the recording apparatus.

[0045] EP-A2-0 965 451 discloses an ink jet recording apparatus and an ink container used for such an apparatus. The ink container comprises an ink bladder containing ink in it and covered by two cover containers, and an ink supply path for supplying ink from the ink container to the recording head of the ink jet recording apparatus is provided. A sub-container is arranged on the ink supply path to retain ink from the ink container provisionally and to supply the ink to the recording head. The sub-container is provided with an ink inlet port for receiving ink from the ink container, and an ink outlet port for leading out ink to the recording head, a sub-ink bladder for forming a closed space with the exception of the ink inlet port and the ink outlet port, and a case for covering the bladder, having

at the same time a communicating portion with the outside to protect the bladder in the closed space with the exception of the communicating portion.

[0046] A pressure adjustment means communicates with the communicating portion to be able to adjust the pressure in the space between the sub-ink bladder and the case, such that ink in the ink container is used effectively for the stabilized output of images in higher quality.

[0047] JP-10-138506 discloses an ink cartridge having an ink supply port to which a flexible supply tube is connected, with a passage valve being connected to the other end of the supply tube. The passage valve is further connected to the ink cartridge to a tube and a tubular needle. An air pump serving as an ink supply means is branched into four systems through a pressure regulator to be connected to the ink cartridge from changeover valve through air pipes.

SUMMARY OF THE INVENTION

[0048] The present invention has been conceived in light of the foregoing technical drawbacks and is aimed at providing an ink cartridge which facilitates a process for assembling the outer shell of an ink cartridge including an ink pack, facilitates disassembly and recycling of a waste cartridge case, and can contribute to conservation of resources.

[0049] The present invention is also aimed at providing an ink cartridge which supplies ink using air pressure and can prevent gushing or leaking of ink, which would otherwise be caused by residual air pressure or variations in ambient temperature.

[0050] The present invention is also aimed at providing an ink cartridge which ensures a stable hermetic state within a case and facilitates assembly and disassembly operations.

[0051] The present invention is also aimed at providing an ink cartridge capable of effectively preventing fracture of an ink pack, which would otherwise be caused when an ink cartridge filled with a small volume of ink is subjected to physical shock.

[0052] The present invention is also aimed at providing an ink cartridge for use with a recording apparatus which pushes ink from an ink cartridge by utilization of pressurized air, wherein, when a low-volume ink cartridge is used, the ink cartridge can prevent deterioration of throughput of the recording apparatus.

[0053] The present invention is also aimed at providing an ink-jet recording apparatus suitable for use with the ink cartridge.

[0054] To achieve the objects, the present invention provides an ink cartridge for use with a recording apparatus which supplies ink to a recording head by application of pressurized air produced by an air pressurization pump according to claim 1, and a combination of an ink cartridge and an ink-jet recording apparatus according to claim 24.

[0055] Preferred embodiments of the invention are in-

licated in the dependent claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0056]

Fig. 1 is a top view showing an example of an ink-jet recording apparatus capable of using ink cartridges according to the present invention;

Fig. 2 is a schematic drawing showing an ink supply system extending from an ink cartridge to a recording head in the recording apparatus shown in Fig. 1;

Fig. 3 is a perspective view showing the construction of a lower case constituting the outer shell of the ink cartridge, useful for understanding the present invention;

Fig. 4 is a perspective view showing the construction of an upper case constituting the outer shell of the ink cartridge, useful for understanding the present invention;

Fig. 5A is an enlarged view of a corner section of the upper case shown in Fig. 4;

Fig. 5B is an enlarged view of a corner section of the upper case shown in Fig. 3;

Fig. 6 is a cross-sectional view showing a state in which the upper case is fixed to the lower case by means of vibratory welding;

Fig. 7 is a cross-sectional view of the upper and lower cases when viewed from line A-A shown in Fig. 6 in the direction designated by arrows;

Figs. 8A and 8B are enlarged schematic diagrams showing portions of the upper and lower cases when they are fixed together by means of vibratory welding;

Figs. 9A and 9B are enlarged views showing a part of the lower case when a heat-welding film is welded to the upper surface of an opening of the lower case; Fig. 10 is a schematic representation showing that a contact surface formed on a cover member is hermetically attached to a counterpart contact surface formed on the lower case, thereby maintaining a sealed state;

Fig. 11 is a cross-sectional view showing a state in which an ink cartridge is removed from a cartridge holder of a recording apparatus;

Fig. 12 is a cross-sectional view showing a state in which the ink cartridge is attached to the cartridge holder;

Fig. 13 is a perspective view showing the appearance and construction of the ink cartridge according to the present invention;

Fig. 14 is an enlarged cross-sectional view of the ink cartridge when viewed from line B-B shown in Fig. 13 in the direction designated by arrows;

Fig. 15 is a perspective view showing the construction of an ink pack to be housed in the ink cartridge shown in Fig. 13;

Fig. 16 is a partially-enlarged cross-sectional view

showing a state in which the ink pack is sealed in the lower case by means of a film member;

Fig. 17 is a perspective view of the corner section of the upper case when viewed from the interior surface of the corner section;

Fig. 18 is a perspective view of the corner section of the upper case when viewed from the top;

Fig. 19 is a perspective view of the entire ink cartridge when viewed from an upper case thereof;

Fig. 20 is a cross-sectional view showing the end section on one side of the ink cartridge and the construction of a connection mechanism provided on the cartridge holder;

Fig. 21 is a perspective view showing the connection mechanism provided on the cartridge holder;

Figs. 22A and 22B are cross-sectional views showing the construction of an ink outlet plug provided on the cartridge and the construction of an ink outlet pipe provided on the cartridge holder;

Fig. 23 is an enlarged view showing a circuit board mounted on the cartridge;

Figs. 24A and 24B are perspective views showing the appearance and construction of the circuit board shown in Fig. 23 in a much enlarged manner;

Fig. 25 is a perspective view showing the appearance and construction of a presser member housed in the cartridge along with the ink pack;

Fig. 26A is a front view showing the presser member shown in Fig. 25;

Figs. 26B and 26C are cross-sectional views showing the presser member shown in Fig. 25;

Fig. 27 is a cross-sectional view showing the cartridge when the ink pack filled with a small amount of ink is housed in the case along with the presser member;

Figs. 28A through 28C are exploded perspective views showing an ink cartridge useful for understanding the present invention;

Fig. 29 is a cross-sectional view of the construction of the ink cartridge taken along line E-E shown in Fig. 28;

Fig. 30 is a cross-sectional view of another example of an ink cartridge, useful for understanding the present invention, showing a construction for fastening the periphery section of the ink pack;

Fig. 31 is a cross-sectional view of still another example of an ink cartridge, useful for understanding the present invention, showing a construction for fastening the periphery section of the ink pack;

Figs. 32A through 32C are perspective views of still another example of an ink cartridge, useful for understanding the present invention, showing a construction for fastening the periphery section of the ink pack;

Fig. 33 is a cross-sectional view of the construction of the ink cartridge taken along line F-F shown in Fig. 32;

Fig. 34 is a cross-sectional view of yet another pre-

ferred example of an ink cartridge, useful for understanding the present invention, showing a construction for fastening the periphery section of the ink pack;

Fig. 35 is a cross-sectional view of another example of an ink cartridge, useful for understanding the present invention, showing a construction for fastening the periphery section of the ink pack; and

Fig. 36 is a cross-sectional view showing an example of a related-art ink cartridge.

DESCRIPTION OF THE PREFERRED EMBODIMENT

[0057] Examples of an ink cartridge useful for understanding the present invention and according to the present invention and an ink-jet recording apparatus using the ink cartridge will be described by reference to illustrated preferred embodiments.

Ink-Jet Recording Apparatus

[0058] Fig. 1 is a top view showing an example of an ink-jet recording apparatus capable of using ink cartridges according to the present invention.

[0059] As shown in Fig. 1, reference numeral 1 designates a carriage. The carriage 1 is constructed so as to cause reciprocatory movement in the longitudinal direction of a paper feed member 5; that is, in the primary scanning direction identical with the widthwise direction of recording paper, while being guided by a scan guide member 4 by way of a timing belt 3 driven by a carriage motor 2.

[0060] Although not shown in Fig. 1, an ink-jet recording head 6 to be described later is mounted on the surface of the carriage 1, which surface opposes the paper feed member 5. Sub-tanks 7a through 7d for supplying ink to the recording head are mounted on the carriage 1.

[0061] In the present embodiment, four sub-tanks 7a through 7d are provided so as to correspond to the types of ink and for temporarily storing the ink therein.

[0062] The sub-tanks 7a through 7d are constructed such that black ink, yellow ink, magenta ink, and cyan ink are supplied to the sub-tanks 7a through 7d from corresponding main tanks 9a through 9d through flexible ink supply tubes 10, respectively. The main tanks 9a through 9d, i.e. ink cartridges, are attached to a cartridge holder 8 provided on the apparatus main body of the recording apparatus.

[0063] Capping means 11 capable of sealing a nozzle-formed plane of the recording head is disposed in a non-print region (i.e., at the home position) on the travel path of the carriage 1. A cap member 11a - which is formed from flexible material, such as rubber, that is capable of sealing a nozzle-formed plane of the recording head - is attached to the upper surface of the capping means 11.

[0064] The cap member 11a is designed to seal the nozzle-formed plane of the recording head when the carriage 1 is moved to the home position.

[0065] During the non-operating period of the recording apparatus, the cap member 11a seals the nozzle-formed plane of the recording head, thereby acting as a cover for preventing drying of nozzle orifices. Although not depicted, one end of a tube of a suction pump (i.e., a tube pump) is connected to the cap member 11a, so that negative pressure generated by the suction pump is applied to the recording head, to thereby perform a cleaning operation for causing the recording head to discharge ink under suction.

[0066] A wiping member 12 formed from resilient material, such as rubber, is disposed adjacent to the capping means 11 and in a print region side with respect to the capping means 11 so as to wipe and clean the nozzle-formed plane of the recording head as required.

[0067] Fig. 2 is a schematic drawing showing an ink supply system extending from an ink cartridge to a recording head in the recording apparatus shown in Fig. 1. The ink supply system will now be described by reference to Fig. 2 in conjunction with Fig. 1, in which like elements are assigned like reference numerals.

[0068] Referring to Figs. 1 and 2, reference numeral 21 designates an air pressurization pump constituting a pressurization unit. The air pressurized by the air pressurization pump 21 is supplied to a pressure regulation valve 22. The pressurized air is supplied to the respective main tanks 9a through 9d (the main tanks are designated in Fig. 2 by simply reference numeral 9, and the main tanks will often be described in singular form by use of only reference numeral 9) by way of a pressure detector 23.

[0069] The pressure regulator valve 22 has the function of maintaining the air pressure applied to the respective main tanks 9a through 9d within a predetermined range by releasing pressure when the air pressurized by the air pressurization pump 21 has reached a predetermined pressure level or greater.

[0070] The pressure detector 23 operates so as to detect the air pressurized by the air pressurization pump 21 and control the operation of the air pressurization pump 21.

[0071] More specifically, when having detected that the air pressurized by the air pressurization pump 21 has reached a predetermined pressure level, the pressure detector 23 stops actuation of the pressurization pump 21 on the basis of the detection result. In contrast, when having detected that the air pressure has fallen below a predetermined pressure level, the pressure detector 23 performs control operation so as to actuate the air pressurization pump 21. By repetition of these operations, the air pressure applied to the main tanks 9a through 9d is maintained within the predetermined range.

[0072] The detailed construction of the main tank 9 will be described later. As the construction of the main tank 9 is schematically shown in Fig. 2, the outer shell of the main tank 9 is formed hermetically. An ink pack 24 which is filled with ink and is formed from resilient material is housed in the main tank 9.

[0073] The space defined by combination of the main tank 9 and the ink pack 24 constitutes a pressure chamber 25, and the pressurized air is supplied to the pressure chamber 25 by way of the pressure detector 23.

[0074] With such a construction, the ink packs 24 housed in the main tanks 9a through 9d are subjected to pressure stemming from the pressurized air, whereby ink flows from the main tanks 9a through 9d to the corresponding sub-tanks 7a through 7d under predetermined pressure.

[0075] The ink pressurized in each of the main tanks 9a through 9d is supplied to the corresponding one of the sub-tanks 7a through 7d mounted on the carriage 1, by way of the corresponding one of ink supply valves 26 and the corresponding one of the ink supply tubes 10. (the sub-tanks are designated in Fig. 2 by use of simply reference numeral 7, and hereinafter the sub-tanks will often be described in singular form by use of simply reference numeral 7).

[0076] As shown in Fig. 2, a float member 31 is provided within the sub-tank 7, and a permanent magnet 32 is attached to a part of the float member 31. Magnetoelectric converter elements 33a and 33b typified by Hall elements are mounted on a board 34, and the board 34 is disposed in close proximity to the side wall of the sub-tank 7.

[0077] With such an arrangement, the permanent magnet 32 provided on the float member 31 and the Hall elements 33a and 33b constitute ink level detection means. In accordance with the amount of lines of magnetic force developing in the permanent magnet 32 according to the position of the float member 31, an electrical output is produced by the Hall elements 33a and 33b.

[0078] When the level of the ink stored in the sub-tank 7 has lowered, the float member 31 housed in the sub-tank 7 is moved under the force of gravity. In association with this movement, the permanent magnet 32 is also moved in the same direction.

[0079] The electrical output produced by the Hall elements 33a and 33b in association with movement of the permanent magnet 32 can be sensed as the level of the ink stored in the sub-tank 7. On the basis of the electrical output produced by the Hall elements 33a and 33b, the ink supply valve 26 is opened. As a result, the pressurized ink in the main tank 9 is supplied to each corresponding sub-tank 7 whose ink level has lowered.

[0080] When the ink stored in the sub-tank 7 has risen to a predetermined level, the ink supply valve 26 is closed on the basis of the electrical output produced by the Hall elements 33a and 33b.

[0081] By repetition of these operations, ink is intermittently supplied from the main tank 9 to the sub-tank 7, thereby constantly storing substantially a given amount of ink within each sub-tank 7.

[0082] The sub-tank 7 is constructed such that ink is supplied from the sub-tank 7 to the recording head 6 by way of a valve 35 and a tube 36 connected thereto. On

the basis of print data supplied to an unillustrated actuator of the recording head 6, ink droplets are ejected from nozzle orifices 6a formed in the nozzle-formed plane of the recording head 6.

[0083] Referring to Fig. 2, reference numeral 11 designates the previously-described capping means, and a tube connected to the capping means 11 is connected to an unillustrated suction pump (i.e., a tube pump).

10 Ink Cartridge

[0084] Ink cartridges according to embodiments of the present invention will be described sequentially from an ink cartridge according to a first embodiment.

15

First Embodiment

[0085] Figs. 3 through 5 illustrate an example ink cartridge (main tank) according to the first embodiment to be used with the ink-jet recording apparatus.

20

[0086] Fig. 3 is a perspective view showing the overall construction of a lower case which acts as a first outer shell constituent member. A lower case 41 is formed in a flattened box-shaped form. The upper surface of the lower case 41 is opened, and an ink pack 24 filled with ink is housed in the lower case 41.

25

[0087] A continuous weld surface 42 is formed along the entirety of the peripheral edge of the lower case 41 so as to be located on a substantially-flat single imaginary plane. An upright flange section 43 is integrally formed on the peripheral edge of the lower case 41 along the outer periphery of the weld surface 42.

30

[0088] Fig. 5B is an enlarged view of a corner section designated by B in Fig. 3.

35

[0089] As will be described later, the upright flange section 43 is formed to prevent splashing of particles, which would otherwise be caused when a director (material to be welded) formed on an upper case is scraped frictionally in a case where the upper case is fixed to the lower case 41 shown in Fig. 3 by vibratory welding, as will be described later.

40

[0090] Grid-shaped reinforcement ribs 44 are formed on the bottom surface of the lower case 41, a surface of the lower case 41 used for defining the pressure chamber 25, to prevent deformation of the lower case 41 caused by air pressure.

45

[0091] In a case where the lower case 41 is formed by, for example, injection molding, the reinforcement ribs 44 are formed integrally and simultaneously with the lower case 41. As will be described later, the upper case is hermetically attached to the lower case 41 to define an internal pressure chamber. In this case, the grid-shaped reinforcement ribs 44 prevent occurrence of deformation, which would otherwise be caused in the direction orthogonal to the surface of the lower case 41 by the air pressure applied to the internal pressure chamber.

50

55

[0092] In other words, forming the grid-shaped reinforcement ribs 44 in the manner as mentioned above

enables an increase in the strength of the lower case 41 in the direction orthogonal to the surface of the lower case 41. Hence, the present embodiment can also contribute to a reduction in the amount of synthetic resin used for forming a lower case.

[0093] In this case, even when the reinforcement ribs 44 are formed on the exterior of the lower case 41, the same reinforcing effects are obtained. In a case where the grid-shaped ribs 44 shown in Fig. 3 are formed on the exterior of the lower case 41, it is difficult to affix on a cartridge a label with a mark showing the trade name or identification of the cartridge. For this reason, forming the ribs 44 on the bottom surface of the lower case 41 in the manner as shown in Fig. 3 is desirable.

[0094] As shown in Fig. 3, a pair of guide holes 45 are formed on a longitudinal end of the lower case 41. In a case where the outer shell of an ink cartridge is constituted by the lower case 41 in conjunction with the upper case to be described later, the guide holes 45 are fitted to and positioned by a pair of guide pins provided on the cartridge holder of the recording apparatus.

[0095] Next, Fig. 4 shows the overall construction of the upper case constituting the main tank. An upper case 51 is formed into a flattened box-shaped form, with the center thereof being recessed slightly. The upper case 51 is constructed so as to act as a cover of the lower case 41.

[0096] A continuous director (e.g., material to be welded) 52 which is to be frictionally welded upon contact with the weld surface 42 is formed along the periphery of the upper case 51, so as to be located on a substantially-flat single imaginary plane. Fig. 5A shows an enlarged view of the corner section designated by A shown in Fig. 4.

[0097] As in the case of the lower case 41, grid-shaped reinforcement ribs 53 are formed on the ceiling lower surface of the upper case 51, i.e. the surface of the upper case 51 defining the pressure chamber 25, to prevent deformation of the surface of the upper case 51, which would otherwise be caused by air pressure.

[0098] In a case where the upper case 51 is formed by, for example, injection molding, the reinforcement ribs 53 are formed integrally and simultaneously with the upper case 51. In a case where the upper case 51 is hermetically attached to the lower case 41, thereby constituting the internal pressure chamber, the grid-shaped reinforcement ribs 53 prevent deformation, which would otherwise arise in the direction orthogonal to the surface of the upper case 51 by the air pressure applied to the internal pressure chamber.

[0099] As mentioned above, even in the case of the upper case 51, the reinforcement ribs 53 are formed on the ceiling lower surface (i.e. an internal surface) of the upper case 51, thus giving consideration to preventing difficulty in affixing on the surface of a cartridge a label of mark representing the trade name or identification of the cartridge.

[0100] Fig. 6 is a cross-sectional view showing a state in which the upper case 51 is fixed to the lower case 41

by vibratory welding, and Fig. 7 is a cross-sectional view taken along an arrow line A-A shown in Fig. 6. In Figs. 6 and 7, elements identical with those which have already been described are assigned the same reference numerals.

[0101] As shown in Figs. 6 and 7, the ink pack 24 which has been filled with ink preliminarily is housed in the lower case 41 from above, prior to vibratory welding. An ink outlet section 55 which seals the ink pack 24 and constitutes an ink outlet port is exposed outside the lower case 41 by way of an opening section 46 formed in the side end section of the lower case 41.

[0102] In this state, an O-ring 56 is abuttingly provided to the opening section 46, and an annular engagement member 57 is pushed and fitted to the opening section 46 from the outside of the lower case 41, so that the ink outlet section 55 of the ink pack 24 can be attached to the opening section 46 of the lower case 41.

[0103] As mentioned above, the ink outlet section 55 of the ink pack 24 is attached to the lower case 41 such that the annular engagement member 57 compresses the O-ring 56 fitted to the opening 46. Hence, the space between the opening section 46 formed in the lower case 41 and the ink outlet section 55 of the ink pack 24 is sealed hermetically.

[0104] After the ink pack 24 has been installed in the interior of the lower case 41 in this way, the upper case 51 is laid on the lower case 41, and the cases 41 and 51 are joined by vibratory welding. Reference numeral 47 shown in Fig. 7 designates an air inlet port to which pressurized air generated by the previously-described air pressurization pump is supplied.

[0105] Figs. 8A and 8B are enlarged diagrams showing a portion of the lower case 41 and a portion of the upper case 51 when the cases 41 and 51 are joined by vibratory welding. More specifically, as shown in Fig. 8A, the peripheral edge of the lower case 41 is supported from below by a stationary vibratory welding jig 61. The peripheral edge of the upper case 51 is pressed from above by a movable vibratory welding jig 62.

[0106] As shown in Fig. 8A, upon receipt of driving force from an unillustrated actuator, the movable vibratory welding jig 62 operates so as to apply load to the upper case 51 in the direction of gravity and horizontal vibration to the same.

[0107] The director 52 formed on the upper case 51 is slid on the weld surface 42 of the lower case 41 while the load is applied to the director 52.

[0108] By frictional heat developing between the director 52 and the weld surface 42, a portion of the director 52 formed on the upper case 51 and a portion of the weld surface 42 formed on the lower case 41 are fused.

[0109] While application of load to the upper case 51 is maintained, horizontal vibratory movement of the movable vibratory welding jig 62 is stopped, so that the upper case 51 is hermetically joined to the lower case 41 as shown in Fig. 8B.

[0110] As mentioned previously, the upright flange

section 43 is formed along the outer periphery of the weld surface 42 of the lower case 41. Even if the director 52 formed on the upper case 51 generates particles during the course of vibratory welding operation, the upright flange section 43 can diminish the extent of the particle splash.

[0111] The outer shell which is constructed in the manner as mentioned above and serves as an ink cartridge is hermetically formed, by fused resin of the upper and lower cases 51 and 41. Accordingly, the outer shell can be preferably adopted for use with an ink-jet recording apparatus constructed so as to introduce air pressure into main tanks serving as ink cartridges as described above.

[0112] The foregoing description shows an example in which the upper case acting as the second outer shell constituent member is hermetically welded, by vibratory welding, to the lower case acting as the first outer shell constituent member. Heat welding means, which will be described later, can be utilized as means for hermetically fixing together the upper and lower cases.

[0113] Figs. 9A and 9B are schematic representations showing a state in which a heat welding film 64 serving as the second outer shell constituent member is heat-welded to the lower case 41 serving as the first outer shell constituent member.

[0114] In this case, a member analogous in construction to the case which has already been described by reference to Fig. 3 is used as a lower case.

[0115] As in the case of the vibratory welding operation shown in Figs. 6 and 7, prior to the heat-welding of the film-shaped member 64 to the lower case 41, the ink-filled ink pack 24 is housed in the lower case 41 from above.

[0116] Subsequently, the ink outlet section 55 attached to the ink pack 24 is exposed outside the lower case 41 by way of the opening section 46 formed in the side end of the lower case 41. The O-ring 56 is sealingly retained with the annular engagement member 57, so that the ink outlet section 55 of the ink pack 24 is fixed to the opening section 46 of the lower case 41.

[0117] As partially shown in Fig. 9A, the weld surface 42 is continuously formed along the entire peripheral edge of the lower case 41 so as to be located on a substantially-flat single imaginary plane. The heat-welding film 64 is heat-welded to the continuous weld surface 42 formed along the peripheral edge of the lower case 41.

[0118] As shown in Fig. 9A, the peripheral edge of the lower case 41 is supported by a stationary jig 66.

[0119] The heat-welding film 64 is placed so as to cover the weld surface 42 formed along the peripheral edge of the lower case 41. In this state, a heater chip 67 is lowered from above to the weld surface 42 formed along the peripheral edge of the lower case 41, thereby bonding the heat-welding film 64 to the weld plane 42 by compression.

[0120] As a result, the heat-welding film 64 is welded to and hermetically bonded to the peripheral edge of the lower case 41.

[0121] The pressure chamber 25 can be hermetically formed within the lower case 41, by bonding the opening in the upper surface of the lower case 41 through use of the heat-welding film 64.

5 [0122] The heat-welding film 64 has a comparatively-flexible characteristic. Therefore, if the ink cartridge in this state is mounted to the recording apparatus, the heat-welding film 64 expands upon receipt of the pressurized air supplied from the air pressurization pump, and thus causes a technical problem in that the air pressure within the pressure chamber 25 defined by the lower case 41 and the heat-welding film 64 is unstable.

10 [0123] Fig. 9B shows a construction for solving such a problem. As shown in Fig. 9B, a reinforcement member 71 is provided for covering the heat-welding film 64 from above. An engagement section 71a which removably engages with the peripheral edge of the lower case 41 is formed integrally along the peripheral edge of the reinforcement member 71.

15 [0124] By this construction, even if the heat-welding film 64 attempts to expand as a result of pressurized air being supplied to the pressure chamber 25 defined by the lower case 41 and the heat-welding film 64, the heat-welding film 64 comes into contact with the surface of the reinforcement member 71, thus preventing expansion of the heat-welding film 64.

20 [0125] Even in such an ink cartridge having the above-described construction, a pressure chamber can be formed between the lower case 41 and the heat-welding film 64. The ink cartridge can be preferably adopted for use with an ink-jet recording apparatus constructed so as to introduce pressurized air into ink cartridges as mentioned above.

25 [0126] Fig. 10 is a schematic representation showing another modification for constructing the ink cartridge.

30 [0127] In the modification shown in Fig. 10, a closely contactable, continuous surface is formed on the cover constituting the second outer shell constituent member, and a mating closely contactable continuous surface is formed on the case constituting the first outer shell constituent member to be closely contacted with the former contactable surface, thereby maintaining the hermetically sealed state of the cover and case.

35 [0128] As the end of the lower case and the end of the cover are shown in cross section in Fig. 10, an arcuate mating contact surface 73 is formed projectingly along the entire peripheral edge of the lower case 41 serving as the first constituent outer shell member.

40 [0129] An arcuate contact surface 76 to come into close contact with the mating contact surface 73 formed along the peripheral edge of the lower case 41 is formed in a recessed manner in the peripheral edge of a cover 75 serving as the second outer shell constituent member.

45 [0130] An engagement section 77 which removably engages with the peripheral edge of the lower case 41 is formed integrally on the cover 75. By the action of the engagement section 77, the case 41 and the cover 75 maintain a hermetic state.

[0131] Even in an ink cartridge having such a construction, a pressure chamber can be formed between the lower case 41 and the cover 75. Accordingly, the ink cartridge can be preferably adopted for use with an ink-jet recording apparatus constructed so as to introduce pressurized air into ink cartridges as mentioned above.

[0132] Even in the case of the construction shown in Fig. 10, an ink pack preliminarily filled with ink is inserted into the lower case 41 acting as the first outer shell constituent member. In this state, the cover 75 acting as the second outer shell constituent member is placed on top of the case 41, in the same manner as has been described in connection with the embodiment including the modification.

[0133] As is evident from the foregoing description, in the ink cartridge according to the first embodiment, an ink pack is housed in the ink cartridge, and an outer shell member of the ink cartridge is constructed such that at least first and second outer shell constituent members are hermetically joined together. Therefore, to form an ink cartridge product, the first and second outer shell constituent members can be joined together in a state in which an ink-filled ink pack has been installed.

[0134] Since the first and second outer shell constituent members are joined together hermetically, disassembly and recycling of a waste cartridge are facilitated, thereby contributing to conservation of resources.

Second Embodiment

[0135] Next will be described an ink cartridge according to the present invention. The ink cartridge according to the present embodiment is featured in that, when the ink cartridge is removed from the recording apparatus, the pressurized air inlet port formed in the cartridge is released, thereby immediately bringing a pressure chamber formed between the outer shell member of the ink cartridge and the ink pack in communication with the atmosphere.

[0136] An opening section 58 is formed in the front end of the lower case 41 having the ink outlet section 55 formed therein in the manner as mentioned previously. When the ink cartridge is loaded into the cartridge holder 8, an ink receive connection section - which will be described later and is provided on the cartridge holder 8 - enters the opening section 58, as shown in Figs. 11 and 12. Accordingly, the ink outlet section 55 provided in the ink cartridge can be connected to the ink receive connection section provided in the cartridge holder 8.

[0137] The ink outlet section 55 is equipped with a valve member 59 which axially retracts upon contact with a connection section of the cartridge holder 8 to be described later, to thereby become open. The valve member 59 is urged by a spring member 60 to advance axially.

[0138] The valve member 59 urged by the spring member 60 so as to advance in the axial direction is pressed against an annular packing member 61 having a through hole 61a formed in the center thereof. Consequently, the

ink outlet section 55 is closed, as shown in Fig. 11.

[0139] The pressurized air inlet port 47 formed in the lower case 41, the case constituting the outer shell of the ink cartridge, is formed as a cylindrical member which defines an air channel communicating with the pressure chamber 25. The cylindrical member is integral with the lower case 41, and protrudes toward the front end section of the cartridge.

[0140] An opening section 164 is formed in the area on the front end section of the lower case 41 corresponding to the pressurized air inlet port 47. As shown in Fig. 12, when the ink cartridge is loaded into the cartridge holder 8, a pressurized air supply section formed in the cartridge holder 8 relatively enters the opening section 77 so that a packing member provided in the pressurized air supply section comes into close contact with and is coupled to the outer peripheral surface of the pressurized air inlet port 47.

[0141] An ink receive connection section 71 is projectingly formed in the center of the cartridge holder 8.

[0142] An open/close valve unit 72 is provided in the connection section 71. When the ink cartridge is loaded in the cartridge holder 8, the open/close valve unit 72 retracts axially upon contact with the ink outlet section 55 of the ink cartridge, to thereby become open. When no ink cartridge is loaded in the cartridge holder 8, the open/close valve unit 72 advances in the axial direction and is maintained closed.

[0143] The open/close unit 72 is equipped with a hollow needle 73 having ink inlet holes 73a formed therein, and an annular slide member 75. The annular slide member 75 is slidably provided so as to surround the outer circumference of the hollow needle 73. When no ink cartridge is loaded in the cartridge holder 8, the annular slide member 75 moves to a position where it closes the ink inlet holes 73a formed in the hollow needle 73 upon receipt of urging force of a spring 74.

[0144] In the case shown in Fig. 11 where no ink cartridge is loaded in the cartridge holder 8, the annular slide member 75 advances upon receipt of urging force of the spring member 74, thereby closing the ink inlet holes 73a formed in the hollow needle 73.

[0145] In the case shown in Fig. 12 where an ink cartridge is loaded into the cartridge holder 8, the ink outlet section 55 comes into contact with the annular slide member 75, to thereby cause the slide member 75 to retract. As a result, the ink inlet holes 73a of the hollow needle 73 becomes exposed and open, to thereby permit inflow of ink.

[0146] Concurrently, the tip end of the hollow needle 73 of the cartridge holder 8 penetrates into the through hole 61a of the packing member 61 of the ink cartridge, to thereby come into contact with the valve member 59. As a result, the valve member 59 axially retracts, thus rendering the ink outlet section 55 of the ink cartridge open.

[0147] As designated by the arrow shown in Fig. 12, ink can be supplied from the ink cartridge to the cartridge

holder 8.

[0148] Simultaneously, the pressurized air inlet port 47 constituting a pressurized air inlet port of the cartridge also enters the annular packing member 78 of the pressurized air supply section 77 provided in the cartridge holder 8.

[0149] The packing member 78 comes into close contact with and is coupled to the outer peripheral surface of the pressurized air inlet port 47. As designated by the arrow shown in Fig. 12, pressurized air can be introduced into the pressure chamber 25 of the cartridge.

[0150] When an ink cartridge is removed from the cartridge holder 8, the pressurized air inlet port 47 communicating with the pressure chamber 25 of the cartridge is released from a sealed state in which the inlet port 47 has been sealed by the packing member 78 of the pressurized air supply section 77 of the cartridge holder 8.

[0151] Accordingly, the pressure chamber 25 of the cartridge is immediately released to the atmosphere by way of the air channel of the pressurized air inlet port 47. Therefore, the ink pack 24 is also immediately released from a pressurized state.

[0152] The ink outlet section 55 of the ink cartridge is also closed, thereby preventing leakage of ink, which would otherwise be caused under force of gravity.

[0153] Concurrently, the ink receive connection section 71 of the cartridge holder 8 is also closed, thus preventing reverse flow of ink from the sub-tank 9.

[0154] As is evident from the foregoing descriptions, in the ink cartridge according to the present invention, when an ink cartridge is removed from the recording apparatus, the pressurized air inlet port 47 formed in the cartridge is released, thereby immediately bringing the pressure chamber defined between the outer shell member of the cartridge and the ink pack 24 into communication with the atmosphere. Consequently, the ink pack 24 is immediately released from a pressurized state, thus preventing inadvertent gushing or leakage of ink from the ink pack 24.

[0155] The recording apparatus, to which the ink cartridge is to be loaded, is equipped with the open/close valve unit 72. Accordingly, when no ink cartridge is loaded in the cartridge holder 8, the open/close valve unit 72 axially advances and is maintained closed, thereby preventing a problem of contamination, which would otherwise be caused by reverse flow of ink from the sub-tank 9.

Third Embodiment

[0156] An ink cartridge according to a third embodiment, an embodiment of the present invention, will now be described. Figs. 13 through 15 show an ink cartridge (main tank) 100 according to the third embodiment of the present invention. Fig. 13 is a perspective view showing the entire construction of a main tank. Fig. 14 is an enlarged cross-sectional view of the ink cartridge when viewed from line B-B shown in Fig. 13 in the direction designated by arrows. Fig. 15 is a perspective view show-

ing the construction of an ink pack 124 housed in an outer shell case shown in Fig. 13.

[0157] As shown in Figs. 13 and 14, the outer shell case is constructed by an upper case 141 acting as a second case (the second outer shell constituent member), and a lower case 142 acting as a first case (the first outer shell constituent member).

[0158] The lower case 142 is formed into a flattened box shape, and the upper side of the lower case 142 is open. An ink-filled ink pack 124 (see Fig. 15) can be housed in the lower case 142.

[0159] In the present embodiment, as shown in Fig. 14, in order to fix the four sides of the ink pack 124 housed in the lower case 142, a quadrilateral intermediate lid 143 which is formed from, for example, styrene foam, and whose center is opened as a window is inserted into the ink cartridge 100. As will be described in detail later, a heat welding film 144 designated by a thick line is heat-welded to a flange section 142a formed along the marginal edge of the opening of the lower case 142, thereby hermetically closing the lower case 142.

[0160] The upper case 141 formed into a flattened box shape is fitted on the lower case 142.

[0161] The upper case 141 acts as a cover for preventing outward expansion of the film 144, which would otherwise be caused when the film 144 is exposed to pressurized air. The upper case 141 is constructed by a planar section 141b acting as the cover member, and a fold section 141c which is integrally formed with the planar section 141b and forms right angles with the planar section 141b.

[0162] Wedge-shaped lug members 141a are intermittently formed along the interior surface of the fold section 141c. As the upper case 141 is pushed on the lower case 142, the lug members 141a engage the flange section 142a formed along the marginal edge of the opening of the lower case 142, whereby the upper case 141 and the lower case 142 are coupled together.

[0163] When pressurized air is introduced into the lower case 142 sealed by the film member 144, the heat welding film 144 is positioned so as to come into contact with the entire interior surface of the upper case 141, thus preventing outward expansion of the film 144, which would otherwise be caused when the film 144 receives pressurized air.

[0164] Fig. 15 shows the structure of the ink pack 124 housed in the outer shell case that is constructed in the manner as mentioned above.

[0165] Two sheets of rectangular flexible material; for example, a polyethylene film, are used for the ink pack 124. In order to improve the gas-barrier characteristic of the ink pack 124, aluminum foil or other metal foil, for example, is laminated on the surface of each film. An ink outlet section 150 constituting an ink outlet port is attached to substantially the center of one lateral side end section of the ink pack 124.

[0166] Three sides, i.e. the lateral side end section having the ink outlet section 150 and the longitudinal side

end sections orthogonal to the lateral side end section, are first joined by heat welding to form a bag. Reference numeral 124b designates a heat-welded section in each of the three sides.

[0167] Ink is filled into the ink pack 124 from the remaining one open side of the ink pack 124 formed into the bag. The remaining side is then joined by heat welding to provide the ink pack 124 sealing storing ink therein. Reference numeral 124c designates a heat-welded section in the remaining side.

[0168] Fig. 16 is a fragmentary enlarged view showing how to seal the ink pack 124 in the lower case 142 by the heat welding film 144. First of all, the lower case 142 is placed on a stationary jig 161 using the flange section 142a formed along the marginal edge of the opening of the lower case 142.

[0169] The ink pack 124 is housed in the lower case 142, and then the quadrilateral intermediate lid 143 whose center is opened as a window is inserted into the lower case 142 to press and hold the four sides of the ink pack 124.

[0170] In this state, the heat welding film 144 is located so as to cover the flange section 142a formed along the marginal edge of the opening of the lower case 142.

[0171] Subsequently, a heater head 162 formed having a flat surface similar in shape to a flat surface of the flange section 142a of the lower case 142 is lowered, thereby heating the film 144 covering the flange section 142a. As a result, the film 144 is heat-welded on and along the flange section 142a of the lower case 142, and the lower case 142 is hermetically sealed with the film 144.

[0172] Figs. 17 and 18 are enlarged views showing the construction of portions of the upper case 141 to be attached to the lower case 142 sealed with the film 144 in the manner as mentioned above. Particularly, the lug members 141a intermittently formed on the interior surface of the fold section 141c of the upper case 141 and the surroundings of the lug members 141a are shown in an enlarged manner.

[0173] Fig. 17 is a perspective view of the corner section of the upper case 141 when viewed from the interior surface of the corner section, and Fig. 18 is a perspective view of the corner section of the upper case 141 when viewed from the top.

[0174] As shown in Fig. 17, a tapered surface 141d is formed on the lug member 141a so as to gradually increase in thickness from the lower end of the fold section 141c to the planar section 141b acting as a cover. An engagement step section 141e is formed on the end of the tapered surface 141d opposing the planar section 141b.

[0175] As shown in Fig. 18, slit holes 141f are formed through the planar section 141b of the upper case 141 to correspond in location to the lug members 141a and to be elongated along the fold section 141c.

[0176] The upper case 141 is laid on and forced to the lower case 142, so that the tapered surface 141d on each

of the lug members 141a comes into slidable contact with the side surface of the flange section 142a formed along the marginal edge of the opening of the lower case 142.

[0177] As the upper case 141 is pushed further toward the lower case 142, the lug members 141a go beyond the flange section 142a formed on the lower case 142. Consequently, the flange section 142a of the lower case 142 is fitted into the engagement steps 141e of the lug members 141a, whereby the upper case 141 and the lower case 142 are attached together.

[0178] In this case, since the slit holes 141f are formed through the planar section 141b of the upper case 141 and along the fold section 141c thereof to correspond in location to the lug members 141a, the fold section 141c having the lug members 141a can be improved in terms of ease of flexure.

[0179] The ease of flexure of the fold section 141c effectively acts to provide relief when the tapered surface 141d of each of the lug members 141a goes beyond the flange section 142a of the lower case 142.

[0180] The provision of such relief is effective to avoid, for example, a problem of whitening of the area in which the lug members 141a are formed or a problem of cracks, which would otherwise be caused when undue stress acts on the lug members 141a when the upper and lower cases, both being made of synthetic resin, are attached together.

[0181] Fig. 19 is a perspective view showing the entirety of the main ink tank 100 serving as the ink cartridge constructed in the manner as mentioned above, when viewed from above the upper case thereof.

[0182] In the present embodiment, five slit holes 141f are formed in either longitudinal side of the upper case 141. Similarly, the lug members 141a are provided at uniform intervals so as to correspond to the slit holes 141f. Moreover, two slit holes 141f are formed in either lateral side of the upper case 141. Similarly, the lug members 141a are also provided so as to correspond to the slit holes 141f.

[0183] In the main tank 100, i.e. the ink cartridge, as mentioned above, as shown in Fig. 13, a pair of open holes 151 to be utilized as positioning means at the time of loading the ink cartridge into the recording apparatus are formed in one surface of the cartridge case.

[0184] The pair of opening holes 151 are spaced apart from each other along a longitudinal direction of the one surface of the lower case 142. When the lower case 142 is formed by, for example, injection molding, the opening holes 151 are molded integrally and simultaneously with the lower case 142.

[0185] The ink outlet section 150 constituting an ink outlet port for the ink pack is attached to a substantially middle position between the positioning opening holes 151 thus disposed at two locations. A pressurized air inlet port 152 and a circuit board 153 to be described in detail later are provided outside the two opening holes 151.

[0186] Simultaneous with molding of the lower case 142, the pressurized air inlet port 152 is molded hollowly

and integrally with the lower case 142. Pressurized air can be introduced into the lower case 142 sealed by the film member 144, by way of the pressurized air inlet port 152.

[0187] Fig. 20 shows the cross section of an end section on one surface of the main tank 100 that serves as the ink cartridge constructed in the manner mentioned above, showing that the main tank 100 is attached to a connection mechanism 155 provided on the cartridge holder 8 of the recording apparatus.

[0188] Fig. 21 is a perspective view showing the connection mechanism 155 provided on the cartridge holder 8.

[0189] As shown in Figs. 20 and 21, a pair of columnar positioning pins 156 are formed on the cartridge holder 8. The positioning pins 156 are fitted into the pair of positioning opening holes 151 formed in the main tank 100, respectively.

[0190] The opening holes 151 are located at two positions in the longitudinal direction of the one surface of the lower case 142, and the two positioning pins 156 provided on the recording apparatus are fitted into the opening holes 151 until the base ends of the pins 156 come into contact with the opening holes 151. Accordingly, the main tank 100 serving as a cartridge can be positioned three-dimensionally.

[0191] As the positioning pins 156 are fitted into the main tank 100, a hollow ink outlet tube 157 provided in substantially the middle position between the pair of positioning pins 156 fits into the ink outlet section 150 attached to the ink pack 124, thereby enabling outflow of ink from the cartridge.

[0192] As a result of the main tank 100 being loaded onto the cartridge holder 8, the pressurized air inlet port 152 is connected to a pressurized air outlet port 158 formed in the holder 8, thus enabling introduction of pressurized air into the main tank 100.

[0193] A terminal mechanism 159 having a plurality of contacts is connected to the circuit board 153 mounted on the main tank 100, thereby enabling exchange of data with semiconductor storage means which is mounted on the circuit board 153 and is to be described later.

[0194] In a case where the main tank 100 is loaded onto the cartridge holder 8, the circuit board 153 mounted on the main tank 100 is arranged vertically and disposed at an upper position in the direction of gravity, as shown in Fig. 20.

[0195] Figs. 22A and 22B are cross-sectional views showing that the hollow ink outlet tube 157 provided in the holder 8 is inserted into the ink outlet section 150 provided on the ink pack 124 as a result of the main tank 100 being loaded to the cartridge holder 8, thereby enabling outflow of ink from the ink cartridge.

[0196] Fig. 22A shows the ink outlet section 150 and the ink outlet tube 157 before they are coupled, and Fig. 22B shows the ink outlet section 150 and the ink outlet tube 157 after coupling.

[0197] An annular rubber packing 150a is fitted into an

exit section of the ink outlet section 150 provided in the ink pack 124. In contrast, a movable member 150b is housed in the ink outlet section 150 so as to enable axial movement.

5 [0198] The movable member 150b is constructed so as to close a central portion of the annular rubber packing 150a under the urging force of the coil-shaped spring member 150c. An opening 157a is formed in a position on the side surface in the vicinity of the tip end of the hollow ink outlet tube 157 provided in the holder 8.

10 [0199] In a state shown in Fig. 22A in which the main tank 100 acting as a cartridge is not loaded in the recording apparatus, the movable member 150b closes the center portion of the annular rubber packing 150a under the urging force of the coil-shaped spring member 150c, thereby preventing leakage of ink from the ink pack 124.

15 [0200] When the main ink tank 100 is loaded in the recording apparatus, the tip end of the ink outlet tube 157 pushes the movable member 150b inwardly against the urging force of the spring member 150c. Accordingly, an ink flow channel designated by arrows is formed, thereby enabling outflow of ink.

20 [0201] In this case, an annular internal-diameter portion of the rubber packing 150a comes into close contact with the outer diameter portion of the ink outlet pipe 157, thus preventing leakage of ink from the contact portion.

25 [0202] Fig. 23 shows the circuit board 153 mounted on the ink cartridge. Figs. 24A and 24B show the appearance and construction of the circuit board 153. Fig. 24A is a perspective view of the circuit board 153 when viewed from the front, and Fig. 24B is a perspective view of the circuit board 153 when viewed from below the underside thereof.

30 [0203] As shown in Fig. 23, the circuit board 152 is located in the corner of the lower case 142 of the cartridge and is mounted on the inner bottom of a cubic space having two adjacent surfaces open. One of the two open surfaces enables connection between the circuit board 153 and the terminal mechanism 159 provided on the cartridge holder 8. The other of the two open surfaces is primarily used when the circuit board 153 is attached to the cartridge case.

35 [0204] As shown in Figs. 24A and 24B, a through hole 153a and a notched hole 153b are formed in the circuit board 153 for mounting the circuit board 153 onto the lower case 142. As designated by phantom lines shown in Fig. 24A, protrusions 142c and 142d for heat-welding purposes to be inserted into the respective through hole 153a and the notched hole 153b are preliminarily formed on the lower case 142.

40 [0205] When the substantially-rectangular circuit board 153 is mounted on the lower case 142, the circuit board 153 is fitted into a recessed section 142b formed as shown in Fig. 23 for positioning the circuit board.

45 [0206] An unillustrated heater chip is brought into contact with the heads of the protrusions 142c and 142d designated by phantom lines shown in Figs. 24A, thus fusing the protrusions. As a result, the circuit board 153

is mounted on the lower case 142, as shown in Fig. 23.

[0207] The heater chip is used as a jig for mounting the circuit board 153 to the lower case 142, and the tip end of the heater chip is inserted into the upper open side of the cubic space in which the circuit board 153 is located.

[0208] As shown in Fig. 24A, electrode contacts 153c are formed on the front side of the circuit board 153 as connection terminals to be brought into electrical contact with the terminal mechanism 159 of the cartridge holder 8 when the main tank 100 is loaded in the cartridge holder 8.

[0209] An electrode contact 153d for checking purpose is formed in a circular shape on the same surface of the circuit board 153 on which the electrode contacts 153 are formed.

[0210] The electrode contacts 153c and 153d are connected to data-readable/writable semiconductor means 154 mounted on the underside of the circuit board 153. When the main tank 100 is loaded on the cartridge holder 8 of the recording apparatus, data pertaining to, for example, the type of ink stored in the main tank, an ink remaining amount, a serial number, and an expiration date, are sent and received between the main tank 100 and the recording apparatus.

[0211] The ink cartridge according to the third embodiment, an embodiment of the present invention, is formed hermetically by the first and second cases 141 and 142, and an ink pack is housed in the ink cartridge. The lug members 141a formed on the second case 142 engage with the flange section 142a of the lower case 142, whereby the first case 141 and 142 are fixed together. Assembly and disassembly of an ink cartridge are readily achieved, thereby contributing to improving the ease of recycling of the constituent members of the ink cartridge.

[0212] In addition, the slit holes 141f are formed in positions on the planar section 141b corresponding to the lug members 141a along the fold section 141c, thereby improving the ease of flexure of the fold section 141c having the lug members 141a. This arrangement is effective to avoid, for example, a problem of whitening the area in which the lug members 141a are formed or a problem of cracks, which would otherwise be caused when undue stress acts on the lug members 141a when the upper and lower cases 141 and 142, both being made of synthetic resin, are attached together.

Fourth Embodiment

[0213] An ink cartridge according to a fourth embodiment, an embodiment of the present invention, will now be described. The ink cartridge according to the present embodiment is equipped with an ink pack press member to be housed in a cartridge case along with an ink pack. The ink cartridge is featured in that, in accordance with the volume of the press member, the volume of ink sealingly stored in the ink pack can be adjusted.

[0214] Therefore, the constructions shown in Figs. 13

through 24 can be adopted as preferable example constructions for the outer shell of the ink cartridge, the ink pack etc. in embodying the fourth embodiment.

[0215] Figs. 25 and 26 show the construction of the press member 143, and Fig. 25 is a perspective view showing the entirety of a press member. Fig. 26A is a front view showing the press member; Fig. 26B is a cross-sectional view of the press member when viewed from line C-C shown in Fig. 26A in the direction designated by arrows; and Fig. 26C is a cross-sectional view of the press member when viewed from line D-D shown in Fig. 26A in the direction designated by arrows.

[0216] As shown in Figs. 25 and 26, the press member 143 is formed into a frame shape having a window-shaped opening 143a in the center of the press member 143. The press member 143 presses the four sealed sides of the rectangular ink pack 124.

[0217] As can be seen from the cross-sectional views shown in Figs. 26B and 26C, the portion of the surface of the press member 143 opposing the four sides of the ink pack 124 is formed to have a tapered surface 143b, which becomes gradually thinner toward the window-shaped opening 143a formed in the center of the press member 143.

[0218] As shown in Fig. 14, the tapered surface 143b is formed to be slightly curved. When the tapered surface 143b is contacted with the center of the ink pack 124 bulges as a result of ink being sealed therein, the tapered surface 143b thus slightly curved smoothly matches the geometry of the periphery of the ink pack 124.

[0219] When the ink pack 124 filled with a large amount of ink is housed in the lower case 142, the press member 143 of small volume is adopted, as shown in Fig. 14.

[0220] When the ink pack 124 filled with a small amount of ink is housed in the lower case 142, the press member 143 of large volume is adopted, as shown in Fig. 27.

[0221] The press member 143 used with the main tank 100 shown in Fig. 27 has the central window-shaped opening 143a smaller in area than that shown in Fig. 14. Similarly, there is formed a tapered surface 143b which becomes gradually thinner toward the window-shaped opening 143a.

[0222] With this construction, the ink pack 124 filled with a small amount of ink is pressed by the press member 143, in areas of the four sides closer to the center of the ink pack 124.

[0223] In spite of an ink pack being filled with a small amount of ink, free movement of the ink pack within the ink cartridge can be effectively prevented. Consequently, it is possible to avoid a problem of damage to an ink pack, which would otherwise be caused when the ink pack is subjected to physical shock during transport.

[0224] As is evident from the foregoing descriptions, the ink cartridge according to the fourth embodiment of the present invention is equipped with an ink press member to be housed in a cartridge case along with an ink pack. In accordance with the volume of the press member, the volume of ink to be filled into the ink pack is

adjusted. For example, so long as a plurality of types of press members are prepared preliminarily, a suitable press member may be selected in accordance with the volume of ink filled into an ink pack, and the thus-selected press member is housed in the cartridge case. Thereby, an ink pack can be housed in the cartridge case without a large clearance.

[0225] Consequently, the degree to which an ink pack will be damaged by physical shock stemming from transport can be decreased significantly.

[0226] In a case where the present invention is applied to an ink cartridge which introduces pressurized air into a cartridge case, the press member whose volume has been selected in accordance with the volume of ink filled in an ink pack is housed in the ink cartridge, and hence the volume of pressurized air to be introduced into the cartridge case can be regulated so as to fall within a predetermined range.

[0227] Consequently, even when a low-volume ink cartridge is used, there is no necessity for introducing a large amount of pressurized air into the cartridge case. Hence, there can be prevented a time lag that would arise from the time a recording apparatus is powered up to the time the recording apparatus enters a standby state, thereby improving throughput of the recording apparatus.

Other Embodiments

[0228] Finally, there will be described a preferred embodiment of a cartridge that can be applied to any one of the ink cartridges of the embodiments set forth, that can effectively prevent a problem of fracture of an ink pack, which would otherwise be caused by vibration or fall of an ink cartridge, and that has superior ease of recycling and enables recycling of not only a case constituting the outer shell but also an ink pack.

[0229] The preferred embodiment is featured in that a recessed section matching the cross section of a pillow-shaped ink pack filled with ink is formed on the interior surface of a hard case constituting the outer shell of an ink cartridge and that ribs capable of pinching the peripheral edge of the ink pack are formed.

[0230] More preferably, the preferred embodiment adopts an arrangement in which a plurality of ribs are formed in both lateral and longitudinal directions of the hard case, an arrangement in which projections and indentations are formed in the areas where the peripheral edge of an ink pack is pinched, and/or an arrangement in which through holes are formed in the peripheral edge of the ink pack, and protrusions are formed in the ribs so as to fit into the corresponding through holes.

[0231] Another preferred embodiment adopts an arrangement in which the geometry of the interior surface of the hard case matches the cross section of an ink-filled ink pack, and the peripheral edge of the ink pack is pinched by the hard case. In addition to this arrangement, the preferred embodiment adopts an arrangement in which projections and indentations are formed in the ar-

reas where the peripheral edge of an ink pack is pinched, and/or an arrangement in which through holes are formed in the peripheral edge, and protrusions to be inserted into the corresponding through holes are formed in the case.

[0232] The preferred embodiments will be described more specifically by reference to the accompanying drawings. Figs. 28A through 28C are exploded views showing a preferred example of an ink cartridge. An ink pack 201 is manufactured by preparing rectangular films, each made of a high polymer film and a high gas-barrier property material layer, such as a metal layer, on the surface of the polymer film, and heat-welding the rectangular films along peripheral edges 201a, 201b, 201c, and 201d of the ink pack 201 to form a bag while forming an ink supply port 201e in one side 201a of the ink pack 201.

[0233] The hard case housing the ink pack 201 is made up of two segments; that is, a box-shaped case main body (lower case) 202 and a cover (upper case) 203. Short ribs 204 for dividing the long sides 201b and 201d in equal lengths are formed on the plane of the lower case main body 202 which opposes the cover 203. Similarly, short ribs 204' for dividing the long sides 201b and 201d in equal lengths are formed on the plane of the cover 203 which opposes the lower case main body 202. Further, long ribs 205 are provided for dividing the short sides 201a and 201c in equal lengths are formed on the same plane of the lower case main body 202 on which the short ribs 204 are formed. Similarly, long ribs 205' are provided for dividing the short sides 201a and 201c in equal lengths are formed on the same plane of the cover 203 on which the short ribs 204' are formed.

[0234] Indentations 204a and 204a' are formed in the short ribs 204 and 204' so as to match the cross section of an ink-filled ink pack, and indentations 205a and 205a' are formed in the long ribs 205 and 205' so as to match the cross section of an ink-filled ink pack. End sections 204b, 204b', 205b, and 205b' of the ribs 204, 204', 205, and 205' opposing the peripheral edges 201a, 201b, 201c, and 201d of the ink pack 201 are set to heights h and h' so that the peripheral edges 201a, 201b, 201c, and 201d of the ink pack 201 can be sandwiched between the ribs 204, 204', 205, and 205' when the cover 203 is fixed on the case main body 202.

[0235] Reference numeral 206 shown in Fig. 28 designates a recess for constituting a window to be used for exposing the ink supply port 201e to the outside.

[0236] In this embodiment, the ink pack 201 filled with a specific volume of ink is placed on the case main body 202 such that the ink supply port 201e is located in the recess 206. As the cover 203 is fixed on the case main body 202, an ink-filled region of the ink pack 201 is supported by the indentations 204a, 204a', 205a, and 205a' of the ribs 204, 204', 205, and 205' without being subjected to the pressure imposed by the plane of the case main body 202 and the plane of the cover 203. Further, the peripheral edges 201a, 201b, 201c, and 201d are sandwiched between the end sections 204b and 204b' of the mutually-opposing ribs 204 and 204' and between

the end sections 205b and 205b' of the mutually-opposing ribs 205 and 205'.

[0237] Even if the ink pack 201 is subjected to vibration or physical shock in this state, the geometry of the ink pack 201 is defined by the indentations 204a, 204a', 205a, and 205a', and hence no great deformation arises in the ink pack 201.

[0238] The peripheral edges 201a, 201b, 201c, and 201d are sandwiched between the case main body 202 and the cover 203. Consequently, there can be prevented movement of an ink pack within the case, which would otherwise be caused by swaying action of ink. Moreover, there can be prevented fracture of an ink pack, which would otherwise be caused when the ink pack is subjected to great physical shock or pressure.

[0239] As the cover 203 is removed from the ink case after the ink stored in the ink cartridge has been consumed and the ink cartridge has been collected by a manufacturer, the ink pack 201 is released from a sandwiched state defined between the case main body 202 and the cover 203 and can be easily taken out of the ink cartridge.

[0240] The thus-removed ink pack is cleansed, and a wearout part, such as a packing of the ink supply port, is replaced with a new part. Then, the ink pack is refilled with ink.

[0241] The thus-refilled ink pack is placed in the case main body 202, and the cover 203 is fixed on the case main body 202 in the same manner as mentioned previously, thus completing a recycling process.

[0242] The above-mentioned embodiment eliminates a necessity for tearing and peeling an ink pack from an ink case, thereby enabling removal of an ink pack bag without inflicting damage, and implementing highly-reliable recycling of an ink cartridge.

[0243] Fig. 29 is a cross-sectional view showing the structure of the case taken along line E-E shown in Fig. 28C. Indentations 204a are formed in ribs 204 provided on the case main body 202 so as to match the cross section of a pillow-shaped ink pack 201 filled with ink 207. Similarly, indentations 204a' are formed in ribs 204' provided on the cover 203 so as to match the same. The peripheral edges 201b and 201d of the ink pack 201 are sandwiched between end sections 204b and 204b' of the ribs 204 and 204'.

[0244] The ribs 204 and 204' regulate deformation of the ink pack 201 made of a flexible film, thus preventing deflection of the film at an acute angle.

[0245] Fig. 30 is a cross-sectional view showing another example structure for sandwiching the peripheral edge of an ink pack. As in the case of the embodiment shown in Figs. 28A through 28C, the ribs 204 and 204' matching the contour of the ink pack 201 are formed on the lower case 202 and the cover 203. Moreover, a protuberance 208 is formed on each of the ends 204b for sandwiching the peripheral edge 201b of the ink pack 201, and a recess 208' is formed on each of the ends 204b' opposing the ends 204b. The protuberances 208 and the recesses 208' are formed in several locations

along the peripheral edge of the ink pack 201.

[0246] The case main body 202 is housed in the ink pack 201, and the cover 203 is placed on the case main body 202 from above. As a result, the peripheral edge 201b of the ink pack 201 is sandwiched, in a clinched manner, between the protuberances 208 and the recesses 208'.

[0247] By sandwiching the peripheral edge of the ink pack 201 at several locations according to the method set forth, the ink pack 201 can be fixedly secured within the case. In this embodiment, the ink pack 201 can be easily taken out from the case upon removal of the cover 203. As in the case of the embodiment shown in Figs. 28A through 28C, recycling of an ink cartridge can be performed readily.

[0248] Fig. 31 is a cross-sectional view showing a construction for sandwiching the peripheral edge of an ink pack according to yet another preferred embodiment. A through hole 209 is formed in the peripheral edge 201b of the ink pack 201. As in the case of the embodiment shown in Figs. 28A through 28C, the ribs 204 and 204' matching the contour of the ink pack 201 are formed on the lower case 202 and the cover 203. A protrusion 210 to be inserted into the through hole 209 is formed on the end section 204, and a hole 210' is formed in the end section 204' so as to correspond to the protrusion 210. The set including the through hole 209, the protrusion 210, and the hole 210' is formed in each of several locations on the peripheral edge of the ink pack 201.

[0249] The ink pack 201 is housed in the case main body 202 such that the protrusions 210 are inserted into the corresponding through holes 209. As the cover 203 is placed on the case main body 202 from above, the ink pack 201 is positioned and fixed by the through holes 209 and the protrusions 210. In the present embodiment, the ink pack 201 can be readily removed by taking off the cover 203. As in the case of the embodiment shown in Figs. 28A through 28C, recycling of an ink cartridge can be readily performed.

[0250] Figs. 32A through 32C show an ink cartridge according to still another embodiment, in an exploded manner. The ink pack 201 is identical in structure with that shown in Figs. 28A through 28C.

[0251] A hard case for housing the ink pack 201 is made up of two segments; that is, the box-shaped case main body 202 and the cover 203. Raised sections 204 and 205 are formed so that an interior surface 202a of the case main body 202 matches the cross section of a pillow-shaped ink-filled ink pack. Similarly, raised sections 204' and 205' are formed so that an interior surface 203a of the cover 203 matches the same.

[0252] End sections 204b, 204b', 205b, and 205b' of the raised sections 204, 204', 205, and 205' opposing the peripheral edges 201a, 201b, 201c, and 201d of the ink pack 201 are set to heights h and h' so that the peripheral edges 201a, 201b, 201c, and 201d of the ink pack 201 can be sandwiched between the raised sections 204, 204', 205, and 205' when the cover 203 is fixed

on the case main body 202.

[0253] Recesses 206 and 206' are formed in the areas of the case main body 202 and the cover 203 where the ink supply port 201e is to be sandwiched. Ribs 204c and 204c' are formed on the back of the areas of the raised sections 204 and 204' with which the ink pack 201 is brought into contact, to thereby improve the rigidity of the raised sections 204 and 204'.

[0254] In the present embodiment, the ink pack 201 filled with a specified volume of ink is placed on the case main body 202 such that the ink supply port 201e comes to the recess 206. As the cover 203 is fixed, the ink-filled area of the ink pack 201 is supported by the interior surfaces 202a and 203a and the raised sections 204, 204', 205, and 205' from both sides without being subjected to pressure. The peripheral edges 201a, 201b, 201c, and 201d are supported by the opposing end sections 204b, 204b', 205b, and 205b'.

[0255] Even if the ink pack 201 is subjected to vibration or physical shock in this state, the geometry of the ink pack 201 is defined by the interior surfaces 202a and 203a of the case and by the raised sections 204, 204', 205, and 205', and hence no great deformation arises in the ink pack 201.

[0256] The peripheral edges 201a, 201b, 201c, and 201d are sandwiched between the end sections 204b, 204b', 205b, and 205b'. Consequently, there can be prevented movement of an ink pack within the case, which would otherwise be caused by swaying action of ink. Moreover, there can be prevented fracture of an ink pack, which would otherwise be caused when the ink pack is subjected to great physical shock or pressure.

[0257] Fig. 33 is a cross-sectional view showing the structure of the case taken along line F-F shown in Fig. 32C. The raised sections 204 are formed on the case main body 202 so as to match the cross section of a pillow-shaped ink pack 201 filled with the ink 207. Similarly, the raised sections 204' are formed on the cover 203 so as to match the same. The peripheral edges 201b and 201d of the ink pack 201 are sandwiched between the mutually-opposing end sections 204b and 204b'.

[0258] Since the cross section of the case main body 202 and that of the cover 203 match the cross section of the ink pack 201, deformation in the ink pack 201 made of a flexible film is regulated, thus preventing deflection of the film at an acute angle.

[0259] Fig. 34 is a cross-sectional view showing another example structure of sandwiching the peripheral edge of an ink pack. The raised sections 204 and 204' are formed such that the cross section of the lower case 202 and that of the cover 203 match the cross section of the pillow-shaped ink pack 201 filled with the ink 207. Moreover, the protuberance 208 is formed on each of the ends 204b for sandwiching the peripheral edge 201b of the ink pack 201, and the recess 208' is formed in each of the ends 204b' opposing the ends 204b. The protuberances 208 and the recesses 208' are formed in each of several locations along the peripheral edge of the ink

pack 201.

[0260] The ink pack 201 is housed in the case main body 202, and the cover 203 is placed on the case main body 202 from above. As a result, the peripheral edge 201b of the ink pack 201 is sandwiched, in a clinched manner, between the protuberances 208 and the recesses 208'. By sandwiching several locations on the peripheral edge of the ink pack 201 according to the method set forth, the ink pack 201 can be fixedly secured within the case.

[0261] In this embodiment, the ink pack 201 can be easily taken out from the case upon removal of the cover 203. As in the case of the embodiment shown in Figs. 28A through 28C, recycling of an ink cartridge can be performed readily.

[0262] Fig. 35 is a cross-sectional view showing a construction for sandwiching the peripheral edge of an ink pack according to yet another preferred embodiment. The through hole 209 is formed in the peripheral edge 201b of the ink pack 201. The raised sections 204 and 204' are formed such that the cross section of the lower case 202 and that of the cover 203 match the cross section of the pillow-shaped ink pack 201 filled with the ink 207. Moreover, the protrusion 210 is inserted into the through hole 209 is formed on the end section 204, and the hole 210' is formed in the end section 204' so as to correspond to the protrusion 210. The set including the through hole 209, the protrusion 210, and the hole 210' is formed in each of several locations on the peripheral edge of the ink pack 201.

[0263] The ink pack 201 is housed in the case main body 202 such that the protrusions 210 are inserted into the corresponding through holes 209. As the cover 203 is placed on the case main body 202 from above, the ink pack 201 is positioned and fixed by the through holes 209 and the protrusions 210.

[0264] In the present embodiment, the ink pack 201 can be readily removed by taking off the cover 203. As in the case of the embodiment shown in Figs. 28A through 28C, recycling of an ink cartridge can be readily performed.

[0265] As mentioned above, in a case where the construction of an ink cartridge of any of several embodiments is employed, deformation in an ink pack, which would otherwise be caused by vibration or physical shock, is regulated in all directions, thus preventing damage to and fracture of the ink pack.

[0266] Positioning of an ink pack is effected by the geometry of a case, thus diminishing variations in quality stemming from accuracy of assembly.

[0267] Since an ink pack does not need to be fixed through use of an adhesive, the number of parts is diminished, thereby resulting in an increase in the efficiency of assembly of an ink cartridge and reducing the costs of an ink cartridge. Since disassembly of the ink cartridge is easy, highly-reliable recycling of an ink cartridge can be achieved.

Claims

1. An ink cartridge (9) for use with a recording apparatus (1 - 5) which supplies ink to a recording head (6) by application of pressurized air produced by an air pressurization pump (21), the ink cartridge (9) comprising:

an outer shell member including:

a lower case (41, 142) having an opening and a continuous, substantially planar weld surface (42, 142a) surrounding the opening and being located on a substantially-flat single imaginary plane;
a heat welding film (64, 144) thermally welded to the weld surface (42, 142a) and hermetically closing the opening; and
an upper case (71, 141) coupled to the lower case and covering the heat welding film;
an ink pack (24, 124) of flexible material storing ink therein, the ink pack being housed within a pressure chamber (25) which is formed by the lower case and the heat welding film.

2. The ink cartridge according to claim 1, wherein the upper case (71) serves as a reinforcement member for reinforcing the heat-welding film (64).
3. The ink cartridge according to claim 1 or 2, wherein an engagement section (71a) removably engaging a peripheral edge (73) of the lower case (41) is formed integrally on a peripheral edge (76) of the upper case (75).
4. The ink cartridge according to any one of claims 1 to 3, wherein reinforcement ribs (44) are formed on an inner surface of the lower case (41), the inner surface at least partially defining the pressure chamber.
5. The ink cartridge according to any one of the preceding claims comprising:

a pressurized air inlet port (47) which is provided to the lower case (41), and through which the pressurized air supplied from the air pressurization pump (21) can be introduced into the pressure chamber (25); and
an ink outlet section (55) which is provided to the ink pack (24), and which enables outflow of ink from the ink pack (24);

wherein, when the ink cartridge (9) is removed from the recording apparatus (1 - 5), the pressurized air inlet port (47) is released, to thereby bring the pressure chamber (25) in communication with the atmosphere,

and the ink outlet section (55) is brought into a closed state.

6. The ink cartridge according to claim 5, wherein the pressurized air inlet port (47) is formed integrally with the lower case (41), and includes a cylindrical member which defines an air channel communicating with the pressure chamber.
7. The ink cartridge according to claim 5 or 6, wherein the ink outlet section (55) has a valve member (59) and, when the ink cartridge (9) is mounted to the recording apparatus (1 - 5), the valve member (59) comes into contact with a connection section (71) of the recording apparatus and recedes in an axial direction, thus becoming open; and when the ink cartridge (9) is removed from the recording apparatus (1 - 5), the valve member (59) advances in the axial direction, thus sustaining a closed state.
8. The ink cartridge according to 7, wherein the ink outlet section (55) has a spring member (80) for urging the valve member (59) so as to advance in the axial direction.
9. The ink cartridge according to any one of claims 5 to 8, wherein the ink outlet section (55) is exposed to the outside of the lower case (41) by way of an opening section (58) formed in the lower case (41), wherein an O-ring (56) is interposed between the opening section (58) and the ink outlet section (55), and wherein an engagement member (57) is provided for establishing a sealed state between the opening section (58) and the ink outlet section (55) by pressing the O-ring (56).
10. The ink cartridge according to any one of the preceding claims, further comprising:
a flange section (142a) which is formed along an edge of the opening of the lower case (142) and which defines the weld surface; and
at least one lug-shaped member (141a) which is formed on the upper case (141) and which engages with the flange section (142a), thereby coupling the lower and upper cases (142, 141) together.
11. The ink cartridge according to claim 10, wherein, after the ink pack (124) is housed in the lower case (142), the opening of the lower case (142) is sealed by thermally welding the heat welding film (144) onto the weld surface, thereby realizing a sealed state, and wherein the upper case (141) functions as a cover for preventing expansion of the heat welding film (144) when the heat welding film (144) receives pressure of the pressurized air.

12. The ink cartridge according to claim 10 or 11, wherein a tapered surface (141d) and an engagement step section (141e) are formed on the lug-shaped member (141a) such that, when the upper case (141) is attached to the lower case (142), the flange section (142a) is relatively guided by and along the tapered surface (141d) to engage with the engagement step section (141e).
13. The ink cartridge according to any one of claims 10 to 12, wherein the upper case (141) is formed by a planar section (141b) acting as a cover and a fold section (141c) formed integral with and perpendicular to the planar section (141b), and the lug-shaped member (141a) is formed on an interior surface of the fold section (141c).
14. The ink cartridge according to claim 13, wherein a plurality of independent lug-shaped members (141a) are intermittently formed on the interior surface of the fold section (141c).
15. The ink cartridge according to claim 14, wherein slit holes (141f) are formed through the planar section (141b) of the upper case (141) to correspond in location to the plurality of independent lug-shaped members (141a), and to be elongated along the fold section (141c).
16. The ink cartridge according to any one of claims 1 to 15, further comprising:
- an ink pack (124) press member (143) disposed within the pressure chamber and between the heat-welding film (144) and the ink pack (124).
17. The ink cartridge according to claim 16, wherein the press member (143) adjusts the volume of ink to be filled into the ink pack (124) in accordance with the volume of the press member (143).
18. The ink cartridge according to claim 16 or 17, wherein the ink pack (124) is formed into a substantially rectangular shape and into a bag by sealing four sides of the ink pack (124); the press member (143) is formed into a frame shape having a window opening (143a) in a central portion thereof; and the four sides of the ink pack (124) are pressed by the frame-shaped press member (143).
19. The ink cartridge according to claim 18, wherein parts of the press member (143) opposing the four sides of the ink pack (124) are gradually reduced in thickness toward the window opening (143) to define slope surfaces (143b).
20. The ink cartridge according to claim 19, wherein the slope surfaces (143b) are curved.
21. The ink cartridge according to any one of claims 16 to 20, wherein the press member (143) is formed from resilient material.
22. The ink cartridge according to any one of claims 16 to 21, wherein after the ink pack (124) and the press member (143) are housed in the lower case (142), the opening of the lower case (142) is sealed by thermally welding the heat welding film (144) onto the weld surface, thereby realizing a sealed state, and wherein the upper case (141) functions as a cover for preventing expansion of the heat welding film (144) when the heat welding film (144) receives pressure of the pressurized air.
23. The ink cartridge according to any one of claims 16 to 22, wherein at least one lug-shaped member (141a) is formed on the upper case (141); and a tapered surface (141a) and an engagement step section (141e) are formed on the lug-shaped member (141d) such that, when the upper case (141) is attached to the lower case (142), a flange section formed on the edge of the opening of the first case is relatively guided by and along the tapered surface (141d) to engage with the engagement step section (141e).
24. A combination of an ink cartridge (9) as defined in any one of claims 1 to 23 and an ink-jet recording apparatus (1 - 5), the recording apparatus comprising:
- a recording head (6) which is mounted on a carriage (1) and is reciprocally moved in a width-wise direction of recording paper; and
a sub-tank (7) which is replenished with ink from the ink cartridge (9) through an ink supply channel (10), and supplies the ink to the recording head (6), wherein
the ink is supplied from the ink cartridge (9) to the sub-tank (7) by application of air pressure to the ink cartridge.
25. The combination to claim 24, wherein the ink supply channel (10) extending from the ink cartridge (9) to the sub-tank (7) is a flexible ink supply tube.
26. The combination according to claim 24 or 25, wherein an ink supply valve (26) is further provided in the ink supply channel (10) extending from the ink cartridge (9) to the sub-tank (7), and the ink supply valve (26) is opened or closed in accordance with a control signal produced by ink level detection means (31, 32, 33a, 33b) for detecting the volume of ink remaining in the sub-tank (7).
27. The combination according to claim 24, 25 or 26, wherein an annular packing member (78) is provided to a cartridge holder (8) to which the ink cartridge (9)

is removably mounted, and, when the ink cartridge (9) is mounted to the cartridge holder (8), the annular packing member (78) comes into close contact with an outer peripheral surface of a cylindrical member (47) which defines an air channel communicating with a pressure chamber (25) of the ink cartridge (9).

28. The combination according to any one of claims 24 through 27, wherein a cartridge holder (8) to which the ink cartridge (9) is removably mounted is provided with an open/close valve unit (72) which, when the ink cartridge (9) is mounted to the cartridge holder (8), comes into contact with an ink outlet section (55) of the ink cartridge (9) and recedes axially, thus becoming open; and wherein, when no ink cartridge (9) is mounted to the cartridge holder (8), the open/close valve unit (2) advances axially, thus maintaining a closed state.

29. The combination according to claim 28, wherein the open/close valve unit (72) is provided with a hollow needle (73) having an ink inlet hole (73a), and a slide member (75); and, when no ink cartridge is mounted to the cartridge holder (8), the slide member (75), receiving urging force of a spring member (74), is moved to a position where the slide member (75) closes the ink inlet hole (73a) formed in the hollow needle (73).

Patentansprüche

1. Tintenkartusche (9) zum Einsatz bei einer Aufzeichnungseinrichtung (1 - 5), die Tinte einem Aufzeichnungskopf (6) durch Anlegen von Druckluft zuführt, die von einer Druckluftpumpe (21) erzeugt wird, wobei die Tintenkartusche (9) aufweist:

ein äußeres Mantelteil, welches aufweist:

ein unteres Gehäuse (41, 142), das eine Öffnung und eine durchgehende, im Wesentlichen ebene Schweißoberfläche (42, 142a) aufweist, welche die Öffnung umgibt, und auf einer im Wesentlichen flachen, einzigen gedachten Ebene angeordnet ist; eine Wärmeschweißfolie (64, 144), die durch Wärmeeinwirkung mit der Schweißoberfläche (42, 142a) verschweißt ist, und die Öffnung hermetisch verschließt; und

ein oberes Gehäuse (71, 141), das mit dem unteren Gehäuse verbunden ist, und die Wärmeschweißfolie abdeckt;

eine Tintenpackung (24, 124) aus flexiblem Material, in welcher Tinte aufbewahrt wird, wobei die Tintenpackung in einer Druckkammer (25) aufgenommen ist, die durch

das untere Gehäuse und die Wärmeschweißfolie gebildet wird.

2. Tintenkartusche nach Anspruch 1, bei welcher das obere Gehäuse (71) als ein Verstärkungsteil zum Verstärken der Wärmeschweißfolie (64) dient.

3. Tintenkartusche nach Anspruch 1 oder 2, bei welcher ein Eingriffsabschnitt (71a), der abnehmbar im Eingriff mit einem Umfangsrand (73) des unteren Gehäuses (41) steht, einstückig auf einem Umfangsrand (76) des oberen Gehäuses (75) vorgesehen ist.

4. Tintenkartusche nach einem der Ansprüche 1 bis 3, bei welcher Verstärkungsrippen (44) auf einer inneren Oberfläche des unteren Gehäuses (41) vorgesehen sind, wobei die innere Oberfläche zumindest teilweise die Druckkammer festlegt.

5. Tintenkartusche nach einem der voranstehenden Ansprüche, bei welcher vorgesehen sind:

eine Druckluft-Einlassöffnung (47), die bei dem unteren Gehäuse (41) vorgesehen ist, und durch welche die von der Druckluftpumpe (21) zugeführte Druckluft in die Druckkammer (25) eingegeben werden kann; und ein Tintenauslassabschnitt (55), der bei der Tintenpackung (24) vorgesehen ist, und ein Herausfließen von Tinte von der Tintenpackung (24) ermöglicht;

wobei dann, wenn die Tintenkartusche (9) von der Aufzeichnungseinrichtung (1 - 5) abgenommen wird, die Druckluft-Einlassöffnung (47) freigegeben wird, um hierdurch die Druckkammer (25) in Verbindung mit der Atmosphäre zu versetzen, und der Tintenauslassabschnitt (55) in einen geschlossenen Zustand versetzt wird.

6. Tintenkartusche nach Anspruch 5, bei welcher die Druckluft-Einlassöffnung (47) einstückig mit dem unteren Gehäuse (41) ausgebildet ist, und ein zylindrisches Teil aufweist, welches einen Luftkanal festlegt, der mit der Druckkammer in Verbindung steht.

7. Tintenkartusche nach Anspruch 5 oder 6, bei welcher der Tintenauslassabschnitt (55) ein Ventiltail (59) aufweist, und dann, wenn die Tintenkartusche (9) an der Aufzeichnungseinrichtung (1 - 5) angebracht wird, das Ventiltail (59) in Kontakt mit einem Verbindungsabschnitt (71) der Aufzeichnungseinrichtung gelangt, und sich in Axialrichtung zurückzieht, wodurch es geöffnet wird; und dann, wenn die Tintenkartusche (9) von der Aufzeichnungseinrichtung (1 - 5) abgenommen wird, das Ventiltail (59) in Axialrichtung vorgestellt wird, wodurch ein geschlossener Zustand aufrechterhalten wird.

8. Tintenkartusche nach Anspruch 7, bei welcher der Tintenauslassabschnitt (55) ein Federteil (60) zum Beaufschlagen des Ventiltails (59) so aufweist, dass es in Axialrichtung vorgestellt wird.
9. Tintenkartusche nach einem der Ansprüche 5 bis 8, bei welcher der Tintenauslassabschnitt (55) zur Außenseite des unteren Gehäuses (41) hin durch einen Öffnungsabschnitt (58) freiliegt, der in dem unteren Gehäuse (41) vorgesehen ist, wobei ein O-Ring (56) zwischen dem Öffnungsabschnitt (58) und dem Tintenauslassabschnitt (55) angeordnet ist, und ein Eingriffsteil (57) vorgesehen ist, um einen abgedichteten Zustand zwischen dem Öffnungsabschnitt (58) und dem Tintenauslassabschnitt (55) einzurichten, durch Druckbeaufschlagung des O-Rings (56).
10. Tintenkartusche nach einem der voranstehenden Ansprüche, bei welcher weiterhin vorgesehen sind:
 ein Flanschabschnitt (142a), der entlang einem Rand der Öffnung des unteren Gehäuses (142) vorgesehen ist, und welcher die Schweißoberfläche festlegt; und
 zumindest ein ansatzförmiges Teil (141a), das auf dem oberen Gehäuse (141) vorgesehen ist, und in Eingriff mit dem Flanschabschnitt (142a) gelangt, wodurch das untere und das obere Gehäuse (142, 141) miteinander verbunden werden.
11. Tintenkartusche nach Anspruch 10, bei welcher, nachdem die Tintenpackung (124) in dem unteren Gehäuse (142) aufgenommen wurde, die Öffnung des unteren Gehäuses (142) durch Wärmeschweißen der Wärmeschweißfolie (144) auf die Schweißoberfläche abgedichtet wird, wodurch ein abgedichteter Zustand erzielt wird, und das obere Gehäuse (141) als eine Abdeckung zum Verhindern einer Aufweitung der Wärmeschweißfolie (144) dient, wenn die Wärmeschweißfolie (144) dem Druck der Druckluft ausgesetzt wird.
12. Tintenkartusche nach Anspruch 10 oder 11, bei welcher eine verjüngte Oberfläche (141d) und ein Eingriffsstufenabschnitt (141e) auf dem ansatzförmigen Teil (141a) vorgesehen sind, sodass dann, wenn das obere Gehäuse (141) an dem unteren Gehäuse (142) angebracht wird, der Flanschabschnitt (142a) relativ durch die verjüngte Oberfläche (141d) und entlang dieser geführt wird, zum Eingriff mit dem Eingriffsstufenabschnitt (141e).
13. Tintenkartusche nach einem der Ansprüche 10 bis 12, bei welcher das obere Gehäuse (141) durch einen ebenen Abschnitt (141b), der als eine Abdeckung dient, und einen Klappabschnitt (141c) gebildet wird, der einstückig mit dem ebenen Abschnitt (141b) und senkrecht zu diesem ausgebildet ist, und das ansatzförmige Teil (141a) auf einer inneren Oberfläche des Klappabschnitts (141c) vorgesehen ist.
14. Tintenkartusche nach Anspruch 13, bei welcher mehrere unabhängige ansatzförmige Teile (141a) intermittierend auf der inneren Oberfläche des Klappabschnitts (141c) vorgesehen sind.
15. Tintenkartusche nach Anspruch 14, bei welcher Schlitzlöcher (141f) so vorgesehen sind, dass sie sich durch den ebenen Abschnitt (141b) des oberen Gehäuses (141) erstrecken, entsprechend in Bezug auf den Ort, den mehreren unabhängigen ansatzförmigen Teilen (141a), und länglich entlang dem Klappabschnitt (141c).
16. Tintenkartusche nach einem der Ansprüche 1 bis 15, bei welcher weiterhin vorgesehen ist:
 ein Eindruckteil (143) für die Tintenpackung (124), das in der Druckkammer und zwischen der Wärmeschweißfolie (144) und der Tintenpackung (124) angeordnet ist.
17. Tintenkartusche Anspruch 16, bei welcher das Andruckteil (143) das Volumen der in die Tintenpackung (124) einzufüllenden Tinte entsprechend dem Volumen des Andruckteils (143) einstellt.
18. Tintenkartusche Anspruch 16 oder 17, bei welcher die Tintenpackung (124) im wesentlichen rechteckförmig und zu einem Beutel durch Abdichtung von vier Seiten der Tintenpackung (124) ausgebildet ist; das Andruckteil (143) in Form eines Rahmens ausgebildet ist, der eine Fensteröffnung (143a) in seinem zentralen Abschnitt aufweist; und die vier Seiten der Tintenpackung (124) durch das rahnenförmige Andruckteil (143) mit Druck beaufschlagt werden.
19. Tintenkartusche nach Anspruch 18, bei welcher Teile des Andruckteils (143), die den vier Seiten der Tintenpackung (124) gegenüberliegen, eine sich allmählich verringernde Dicke zur Fensteröffnung (143) hin aufweisen, um Schräglflächen (143b) festzulegen.
20. Tintenkartusche nach Anspruch 1), bei welcher die Schräglflächen (143b) gekrümmt sind.
21. Tintenkartusche nach einem der Ansprüche 16 bis 20, bei welcher das Andruckteil (143) aus elastischem Material besteht.
22. Tintenkartusche nach einem der Ansprüche 16 bis 21, bei welcher, nachdem die Tintenpackung (124) und das Andruckteil (143) in dem unteren Gehäuse

(142) aufgenommen wurden, die Öffnung des unteren Gehäuses (142) abgedichtet wird, durch Wärmeschweißen der Wärmeschweißfolie (144) auf die Schweißoberfläche, wodurch ein abgedichteter Zustand erzielt wird, und das obere Gehäuse (141) als eine Abdeckung zum Verhindern einer Aufweitung der Wärmeschweißfolie (144) dient, wenn die Wärmeschweißfolie (144) dem Druck der Druckluft ausgesetzt ist.

23. Tintenkartusche nach einem der Ansprüche 16 bis 22, bei welcher zumindest ein ansatzförmiges Teil (141a) auf dem oberen Gehäuse (141) vorgesehen ist; und eine verjüngte Oberfläche (141a) und ein Eingriffstufenabschnitt (141e) auf dem ansatzförmigen Teil (141d) vorgesehen sind, sodass dann, wenn das obere Gehäuse (141) an dem unteren Gehäuse (142) angebracht wird, ein Flanschabschnitt, der auf dem Rand der Öffnung des ersten Gehäuses vorgesehen ist, relativ durch die verjüngte Oberfläche (141d) und entlang dieser geführt wird, zum Eingriff mit dem Eingriffstufenabschnitt (141e).

24. Kombination aus einer Tintenkartusche (9) nach einem der Ansprüche 1 bis 23 und einer Tintenstrahl-aufzeichnungseinrichtung (1 - 5), wobei die Aufzeichnungseinrichtung aufweist:

einen Aufzeichnungskopf (6), der auf einem Schlitten (1) angebracht ist, und der in Richtung der Breite von Aufzeichnungspapier hin- und herbewegt wird; und

einen Untertank (7), der mit Tinte von der Tintenkartusche (9) durch einen Tintenzufuhrkanal (10) nachgefüllt wird, und die Tinte dem Aufzeichnungskopf (6) zuführt, wobei die Tinte von der Tintenkartusche (9) dem Untertank (7) durch Einsatz von Luftdruck zur Tintenkartusche zugeführt wird.

25. Kombination nach Anspruch 24, bei welcher der Tintenzufuhrkanal (10), der sich von der Tintenkartusche (9) zum Untertank (7) erstreckt, ein flexibles Tintenzufuhrrohr ist.

26. Kombination nach Anspruch 24 oder 25, bei welcher ein Tintenzufuhrventil (26) weiterhin in dem Tintenzufuhrkanal (10) vorgesehen ist, der sich von der Tintenkartusche (9) zum Untertank (7) erstreckt, und das Tintenzufuhrventil (26) in Abhängigkeit von einem Steuersignal geöffnet oder geschlossen wird, das von einer Tintenniveau-Detektorvorrichtung (31, 32, 33a, 33b) erzeugt wird, um das Volumen der Tinte festzustellen, die in dem Untertank (7) übrig ist.

27. Kombination nach Anspruch 24, 25 oder 26, bei welcher ein ringförmiges Dichtungsteil (78) bei einem Kartuschenhalter (8) vorgesehen ist, an welchem die

Tintenkartusche (9) abnehmbar angebracht wird, und dann, wenn die Tintenkartusche (9) an dem Kartuschenhalter (8) angebracht wird, das ringförmige Dichtungsteil (78) in engen Kontakt mit einer Außenumfangsoberfläche eines zylindrischen Teils (47) gelangt, welches einen Luftkanal festlegt, der in Verbindung mit einer Druckkammer (25) der Tintenkartusche (9) steht.

28. Kombination einem der Ansprüche 24 bis 27, bei welcher ein Kartuschenhalter (8), an welchem die Tintenkartusche (9) abnehmbar angebracht wird, mit einer Öffnungs-/Schließventileinheit (72) versehen ist, die dann, wenn die Tintenkartusche (9) an dem Kartuschenhalter (8) angebracht wird, in Kontakt mit einem Tintenauslassabschnitt (55) der Tintenkartusche (9) gelangt, und sich in Axialrichtung zurückzieht, wodurch sie geöffnet wird; und dann, wenn keine Tintenkartusche (9) an dem Kartuschenhalter (8) angebracht ist, die Öffnungs-/Schließventileinheit (2) in Axialrichtung vorgestellt wird, wodurch ein geschlossener Zustand beibehalten wird.

29. Kombination nach Anspruch 28, bei welcher die Öffnungs-/Schließventileinheit (72) mit einer hohlen Nadel (73) versehen ist, die ein Tinteneinlassloch (73a) aufweist, und mit einem Gleitteil (75); wobei dann, wenn keine Tintenkartusche an dem Kartuschenhalter (8) angebracht ist, das Gleitteil (75), welches die Beaufschlagungskraft eines Federteils (74) aufnimmt, zu einer Position bewegt wird, an welcher das Gleitteil (75) das Tinteneinlassloch (73a) schließt, das in der hohlen Nadel (73) vorgesehen ist.

Revendications

1. Cartouche d'encre (9) pour l'utilisation avec un dispositif d'enregistrement (1 - 5) qui délivre de l'encre à une tête d'enregistrement (6) par application d'air sous pression produit par une pompe de mise sous pression (21), la cartouche d'encre (9) comprenant :

un élément d'enveloppe extérieure comprenant :

un boîtier inférieur (41, 142) ayant une ouverture et une surface de soudure continue sensiblement plane (42, 142a) entourant l'ouverture et étant située sur un unique plan imaginaire sensiblement plat ;
un film de thermosoudure (64, 144) thermosoudé à la surface de soudure (42, 142a) et fermant hermétiquement l'ouverture ; et
un boîtier supérieur (71, 141) accouplé au boîtier inférieur et recouvrant le film de thermosoudure ;

une poche d'encre (24, 124) en matériau souple stockant de l'encre à l'intérieur, la poche d'encre étant logée à l'intérieur d'une chambre de pression (25) qui est formée par le boîtier inférieur et le film de thermosoudure.

2. Cartouche d'encre selon la revendication 1, dans laquelle le boîtier supérieur (71) sert comme élément de renfort pour renforcer le film de thermosoudure (64).
3. Cartouche d'encre selon la revendication 1 ou 2, dans laquelle une section d'engagement (71a) engageant de manière amovible un bord périphérique (73) du boîtier inférieur (41) est formée intégralement sur un bord périphérique (76) du boîtier supérieur (75).
4. Cartouche d'encre selon l'une quelconque des revendications 1 à 3, dans laquelle des nervures de renfort (44) sont formées sur une surface intérieure du boîtier inférieur (41), la surface intérieure définissant au moins partiellement la chambre de pression.
5. Cartouche d'encre selon l'une quelconque des revendications précédentes, comprenant :

un orifice d'entrée d'air sous pression (47) qui est disposé sur le boîtier inférieur (41) et à travers lequel l'air sous pression délivré par la pompe de mise sous pression (21) peut être introduit dans la chambre de pression (25) ; et une section de sortie d'encre (55) qui est disposée sur la poche d'encre (24) et qui permet la décharge d'encre à partir de la poche d'encre (24) ;

dans laquelle, quand la cartouche d'encre (9) est retirée du dispositif d'enregistrement (1 - 5), l'orifice d'entrée d'air sous pression (47) est libéré, pour mettre ainsi la chambre de pression (25) en communication avec l'atmosphère et la section de sortie d'encre (55) est amenée dans un état fermé.
6. Cartouche d'encre selon la revendication 5, dans laquelle l'orifice d'entrée d'air sous pression (47) est formé d'une seule pièce avec le boîtier inférieur (41) et comprend un élément cylindrique qui définit un canal d'air communiquant avec la chambre de pression.
7. Cartouche d'encre selon la revendication 5 ou 6, dans laquelle la section de sortie d'encre (55) a un élément de soupape (59) et, quand la cartouche d'encre (9) est montée sur le dispositif d'enregistrement (1 - 5), l'élément de soupape (59) vient en contact avec une section de connexion (71) du dispositif

d'enregistrement et recule dans une direction axiale, en devenant ainsi ouvert ; et, quand la cartouche d'encre (9) est retirée du dispositif d'enregistrement (1 - 5), l'élément de soupape (59) avance dans la direction axiale, en soutenant ainsi un état fermé.

8. Cartouche d'encre selon la revendication 7, dans laquelle la section de sortie d'encre (55) a un élément de ressort (60) pour pousser l'élément de soupape (59) de manière à avancer dans la direction axiale.
9. Cartouche d'encre selon l'une quelconque des revendications 5 à 8, dans laquelle la section de sortie d'encre (55) est exposée à l'extérieur du boîtier inférieur (41) par le biais d'une section d'ouverture (58) formée dans le boîtier inférieur (41), dans laquelle un joint torique (56) est interposé entre la section d'ouverture (58) et la section de sortie d'encre (55) et dans laquelle un élément d'engagement (57) est disposé pour établir un état étanche entre la section d'ouverture (58) et la section de sortie d'encre (55) en comprimant le joint torique (56).
10. Cartouche d'encre selon l'une quelconque des revendications précédentes, comprenant en outre :

une section de bride (142a) qui est formée le long d'un bord de l'ouverture du boîtier inférieur (142) et qui définit la surface de soudure ; et au moins un élément en forme d'oreille (141a) qui est formé sur le boîtier supérieur (141) et qui s'engage la section de bride (142a), en accouplant ainsi les boîtiers inférieur et supérieur (142, 141) l'un à l'autre.
11. Cartouche d'encre selon la revendication 10, dans laquelle, après que la poche d'encre (124) est logée dans le boîtier inférieur (142), l'ouverture du boîtier inférieur (142) est scellée en thermosoudant le film de thermosoudure (144) sur la surface de soudure, en réalisant ainsi un état étanche, et dans laquelle le boîtier supérieur (141) opère comme un couvercle pour empêcher la dilatation du film de thermosoudure (144) quand le film de thermosoudure (144) reçoit une pression de l'air sous pression.
12. Cartouche d'encre selon la revendication 10 ou 11, dans laquelle une surface en biseau (141d) et une section de gradin d'engagement (141e) sont formées sur l'élément en forme d'oreille (141a) de manière que, quand le boîtier supérieur (141) est fixé au boîtier inférieur (142), la section de bride (142a) soit guidée relativement par et suivant la surface en biseau (141d) pour s'engager avec la section de gradin d'engagement (141e).
13. Cartouche d'encre selon l'une quelconque des revendications 10 à 12, dans laquelle le boîtier supé-

- rieur (141) est formé par une section plane (141b) agissant comme un couvercle et une section repliée (141c) formée d'une seule pièce avec et perpendiculaire à la section plane (141b), et l'élément en forme d'oreille (141a) est formé sur une surface interne de la section repliée (141c).
14. Cartouche d'encre selon la revendication 13, dans laquelle une pluralité d'éléments indépendants en forme d'oreille (141a) est formée de manière intermittente sur la surface interne de la section repliée (141c),
15. Cartouche d'encre selon la revendication 14, dans laquelle des trous à fente (141f) sont formés à travers la section plane (141b) du boîtier supérieur (141) pour correspondre en position à la pluralité d'éléments indépendants en forme d'oreille (141a) et pour être allongés suivant la section repliée (141c).
16. Cartouche d'encre selon l'une quelconque des revendications 1 à 15, comprenant en outre :
- Un élément de pression (143) de poche d'encre (124) disposé à l'intérieur de la chambre de pression et entre le film de thermosoudure (144) et la poche d'encre (124).
17. Cartouche d'encre selon la revendication 16, dans laquelle l'élément de pression (143) règle le volume d'encre destinée à être introduite dans la poche d'encre (124) en fonction du volume de l'élément de pression (143).
18. Cartouche d'encre selon la revendication 16 ou 17, dans laquelle la poche d'encre (124) est formée avec une forme sensiblement rectangulaire et en un sachet en scellant quatre côtés de la poche d'encre (124) ; l'élément de pression (143) est formé dans une forme de cadre ayant une ouverture en fenêtre (143a) dans une portion centrale de celui-ci ; et les quatre côtés de la poche d'encre (124) sont pressés par l'élément de pression en forme de cadre (143).
19. Cartouche d'encre selon la revendication 18, dans laquelle des parties de l'élément de pression (143) faisant face aux quatre côtés de la poche d'encre (124) sont progressivement réduites en épaisseur vers l'ouverture en fenêtre (143) pour définir des surfaces inclinées (143b).
20. Cartouche d'encre selon la revendication 19, dans laquelle les surfaces inclinées (143b) sont courbes.
21. Cartouche d'encre selon l'une quelconque des revendications 16 à 20, dans laquelle l'élément de pression (143) est formée en matériau élastique.
22. Cartouche d'encre selon l'une quelconque des revendications 16 à 21, dans laquelle, après que la poche d'encre (124) et l'élément de pression (143) sont logés dans le boîtier inférieur (142), l'ouverture du boîtier inférieur (142) est scellé en soudant hermétiquement le film de thermosoudure (144) sur la surface de soudure, en réalisant ainsi un état étanche, et dans laquelle le boîtier supérieur (141) opère comme un couvercle pour empêcher la dilatation du film de thermosoudure (144) quand le film de thermosoudure (144) reçoit une pression de l'air sous pression.
23. Cartouche d'encre selon l'une quelconque des revendications 16 à 22, dans laquelle au moins un élément en forme d'oreille (141a) est formé sur le boîtier supérieur (141) ; et une surface en biseau (141a) et une section de gradin d'engagement (141e) sont formées sur l'élément en forme d'oreille (141d) de manière que, quand le boîtier supérieur (141) est fixé au boîtier inférieur (142), une section de bride formée sur un bord de l'ouverture du premier boîtier soit guidée relativement par et suivant la surface en biseau (141d) pour s'engager avec la section de gradin d'engagement (141e).
24. Combinaison d'une cartouche d'encre (9) selon l'une quelconque des revendications 1 à 23 et d'un dispositif d'enregistrement à jet d'encre (1 - 5), le dispositif d'enregistrement comprenant :
- une tête d'enregistrement (6) qui est montée sur un chariot (1) et est déplacée alternativement dans une direction de largeur du papier d'enregistrement ; et
- un réservoir secondaire (7) qui est rempli avec de l'encre à partir de la cartouche d'encre (9) à travers le canal d'alimentation d'encre (10) et délivre l'encre à la tête d'enregistrement (6), dans laquelle
- l'encre est délivrée de la cartouche d'encre (9) au réservoir secondaire (7) par application de pression d'air à la cartouche d'encre.
25. Combinaison selon la revendication 24, dans laquelle le canal d'alimentation d'encre (10) s'étendant de la cartouche d'encre (9) au réservoir secondaire (7) est un tube d'alimentation d'encre flexible.
26. Combinaison selon la revendication 24 ou 25, dans laquelle une soupape d'alimentation d'encre (26) est disposée en outre dans le canal d'alimentation d'encre (10) s'étendant de la cartouche d'encre (9) au réservoir secondaire (7) et la soupape d'alimentation d'encre (26) est ouverte ou fermée en fonction d'un signal de commande produit par des moyens de détection de niveau d'encre (31, 32, 33a, 33b) pour détecter le volume d'encre restant dans le réservoir

secondaire (7).

27. Combinaison selon la revendication 24, 25 ou 26, dans laquelle un élément de garniture annulaire (78) est disposé sur un support de cartouche (8) sur lequel la cartouche d'encre (9) est montée de manière amovible et, quand la cartouche d'encre (9) est montée sur le support de cartouche (8), l'élément de garniture annulaire (78) vient en contact étroit avec une surface périphérique extérieure d'un élément cylindrique (47) qui définit un canal d'air communiquant avec une chambre de pression (25) de la cartouche d'encre (9). 5 10
28. Combinaison selon l'une quelconque des revendications 24 à 27, dans laquelle un support de cartouche (8) sur lequel la cartouche d'encre (9) est montée de manière amovible est pourvu d'une unité de soupape d'ouverture/fermeture (72) qui, quand la cartouche d'encre (9) est montée sur le support de cartouche (8), vient en contact avec une section de sortie d'encre (55) de la cartouche d'encre (9) et recule axialement, en devenant ainsi ouverte ; et dans laquelle, quand aucune cartouche d'encre (9) n'est montée sur le support de cartouche (8), l'unité de soupape d'ouverture/fermeture (2) avance axialement, en maintenant ainsi un état fermé. 15 20 25
29. Combinaison selon la revendication 28, dans laquelle l'unité de soupape d'ouverture/fermeture (72) est munie d'une aiguille creuse (73) ayant un trou d'entrée d'encre (73a) et d'un élément coulissant (75) ; et, quand aucune cartouche d'encre (9) n'est montée sur le support de cartouche (8), l'élément coulissant (75), en recevant une force de poussée d'un élément de ressort (74), est déplacé dans une position où l'élément coulissant (75) ferme le trou d'entrée d'encre (73a) formé dans l'aiguille creuse (73). 30 35 40 45 50 55

FIG. 1

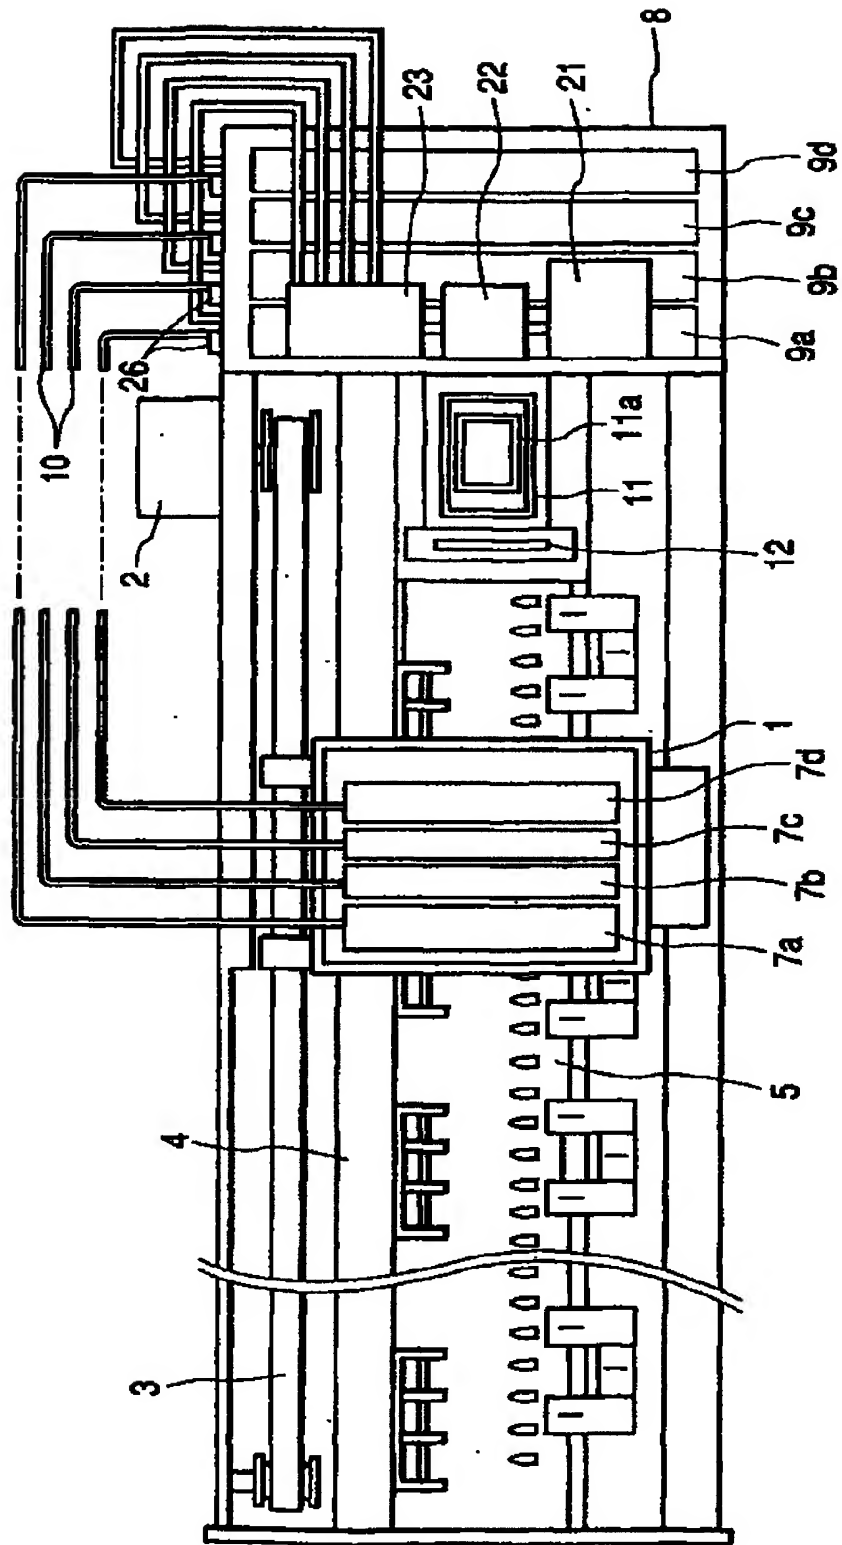


FIG. 2

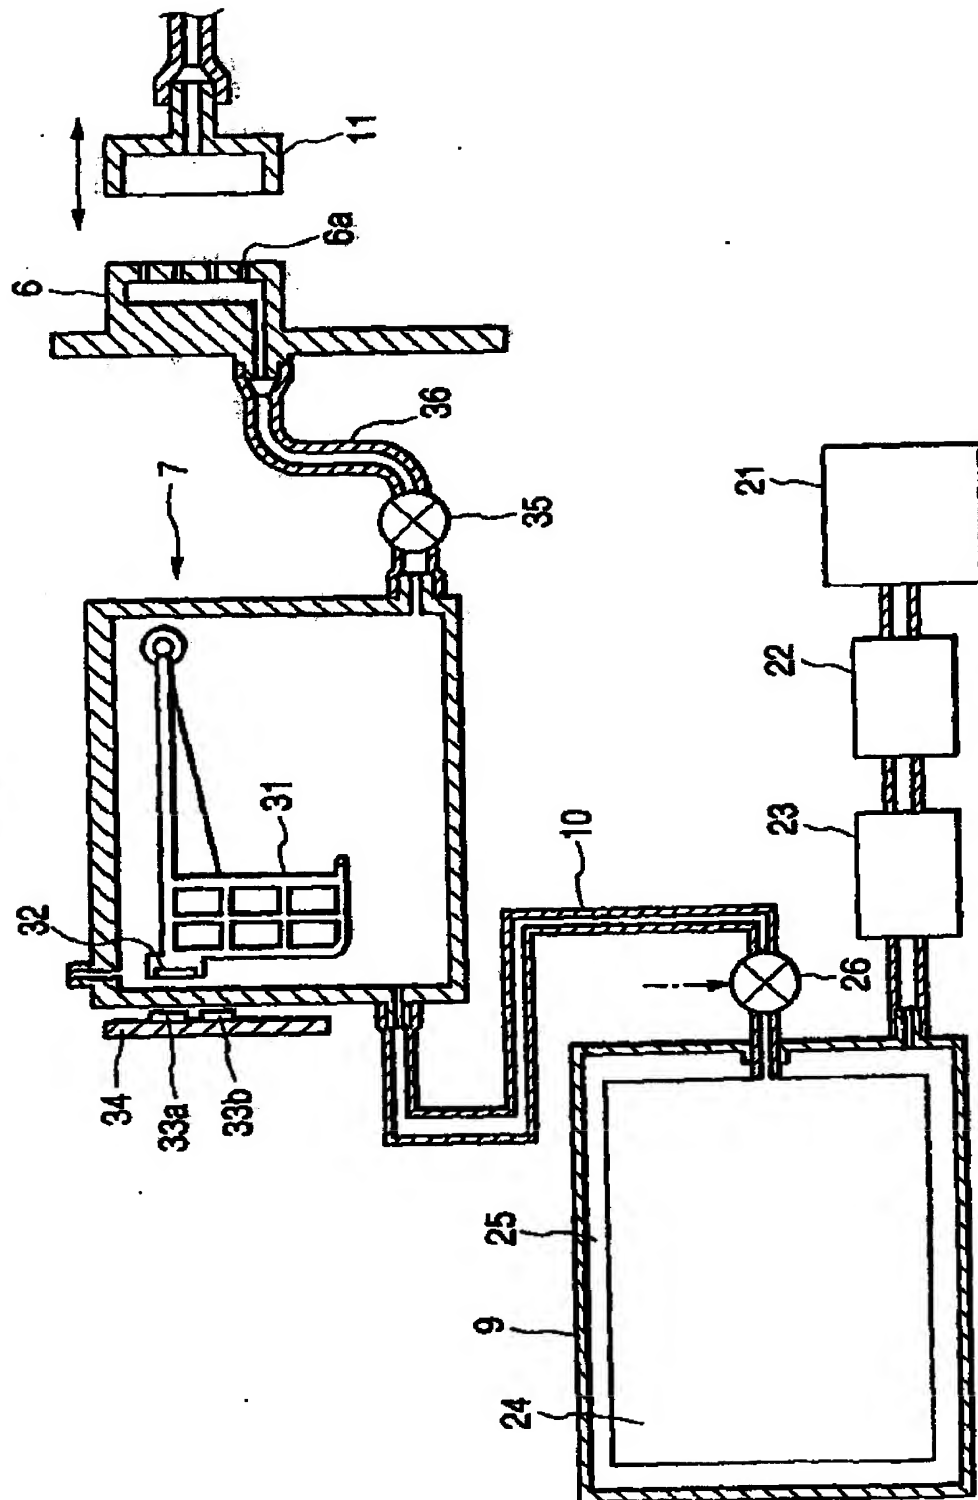


FIG. 3

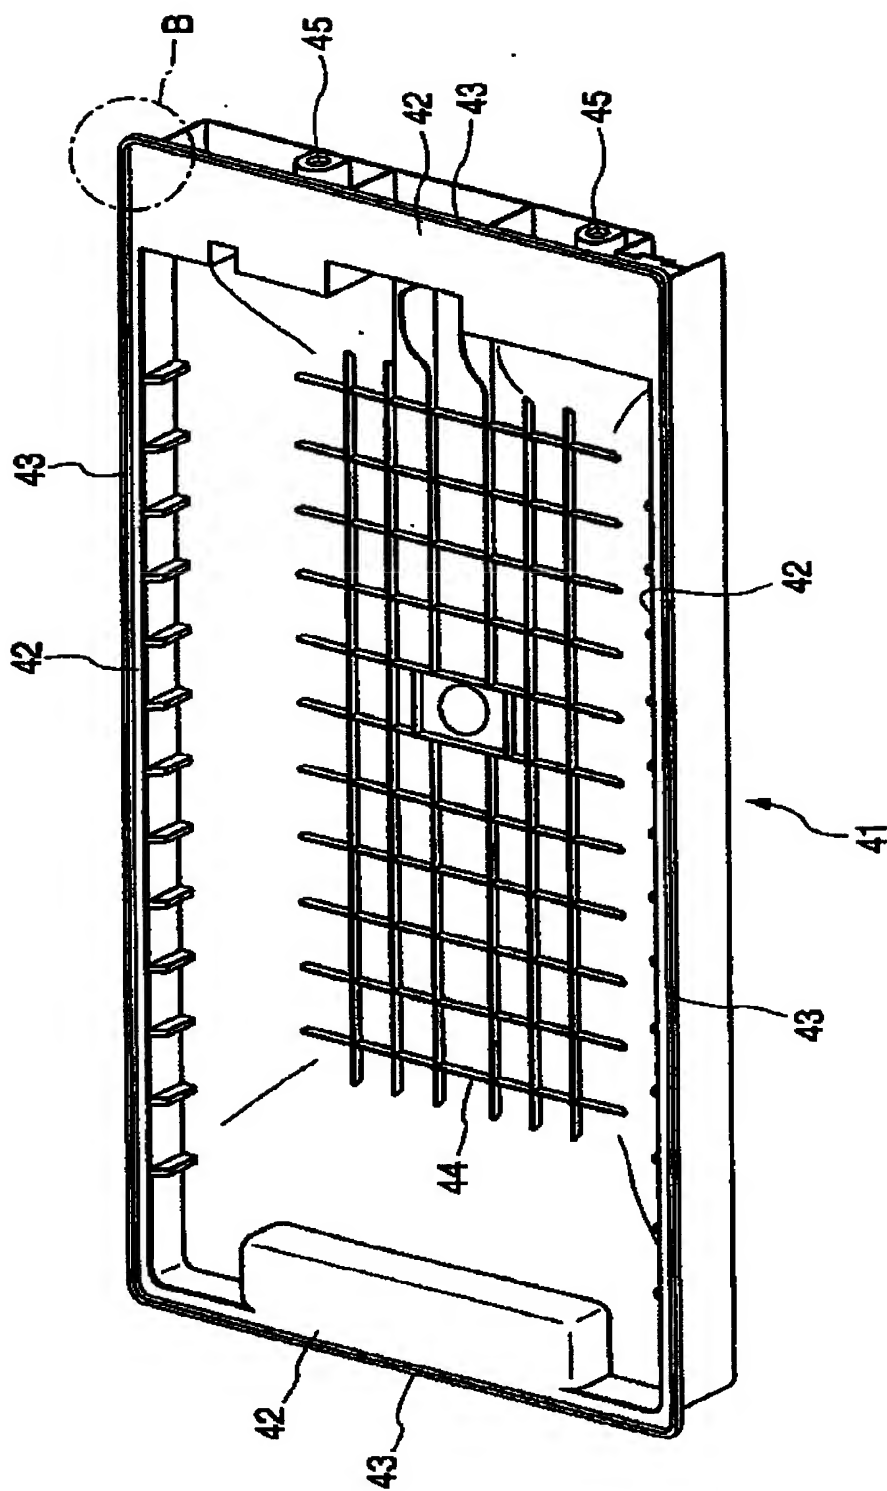


FIG. 4

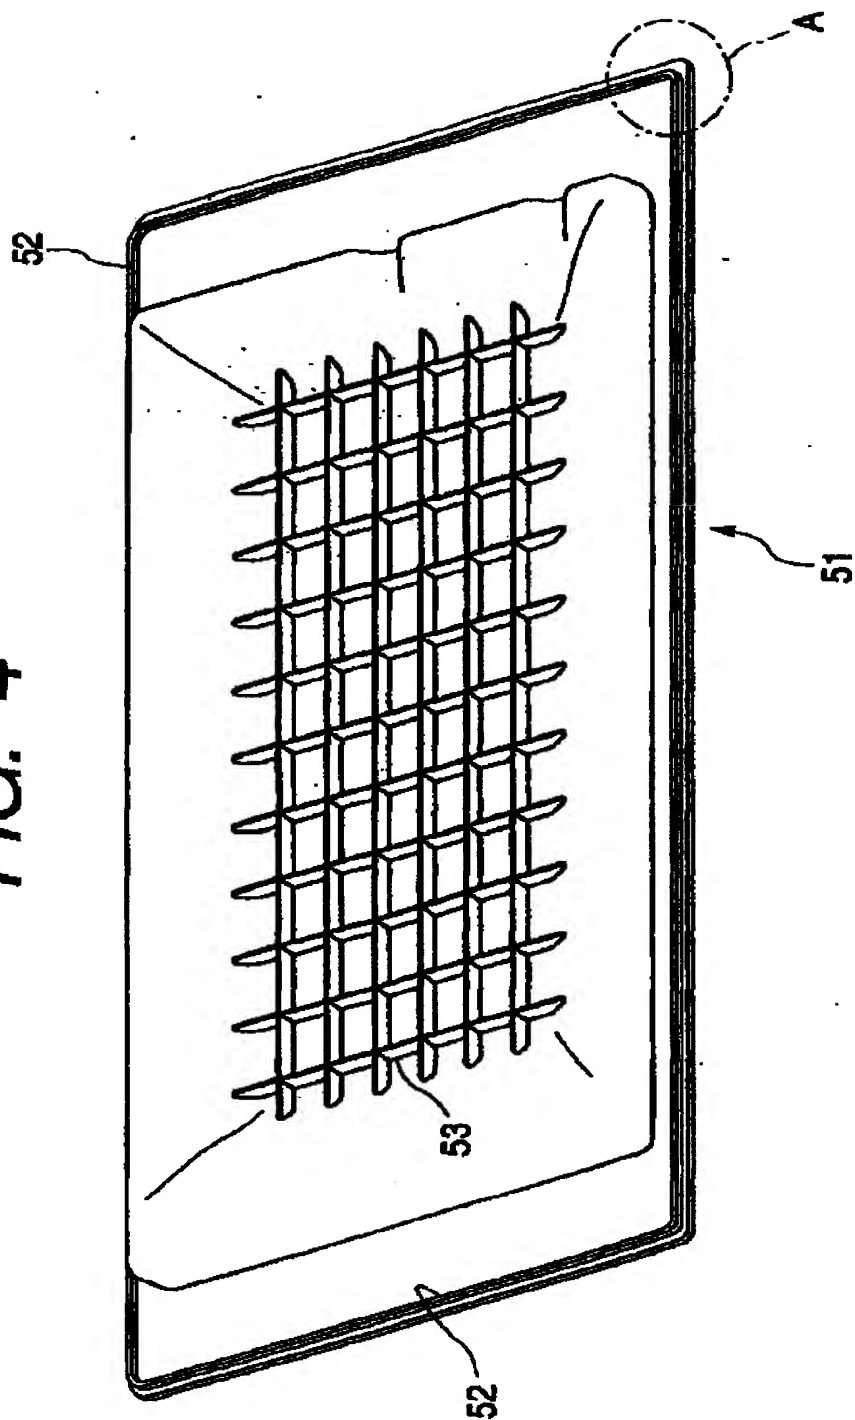


FIG. 5A

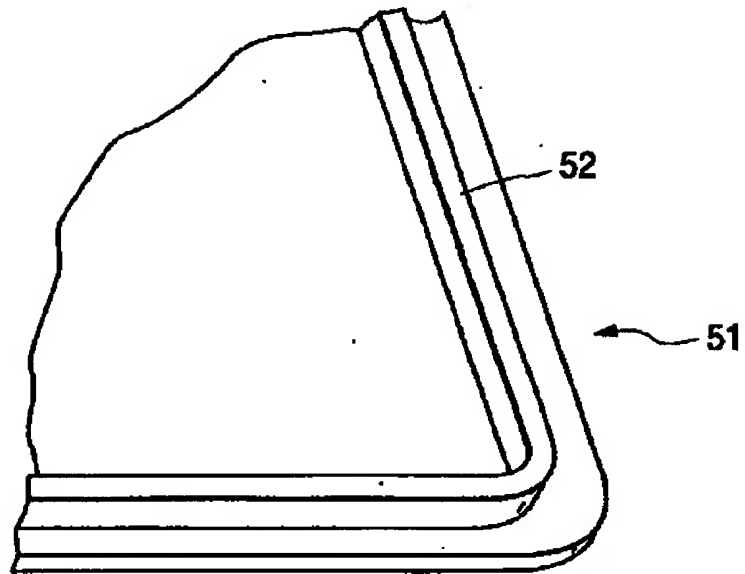


FIG. 5B

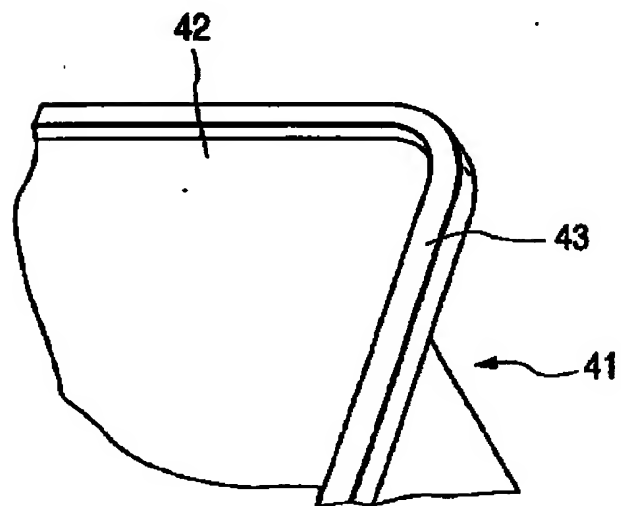


FIG. 6

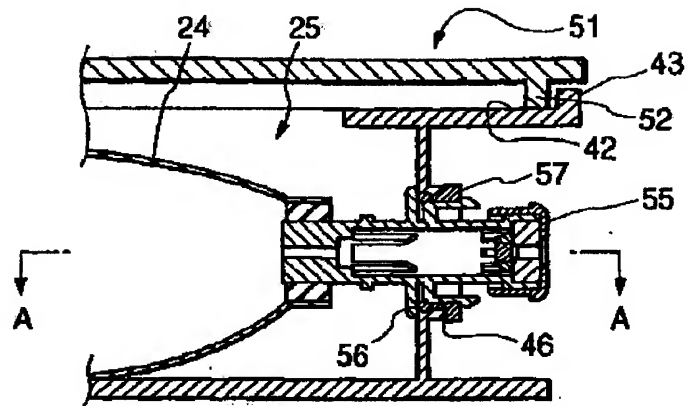


FIG. 7

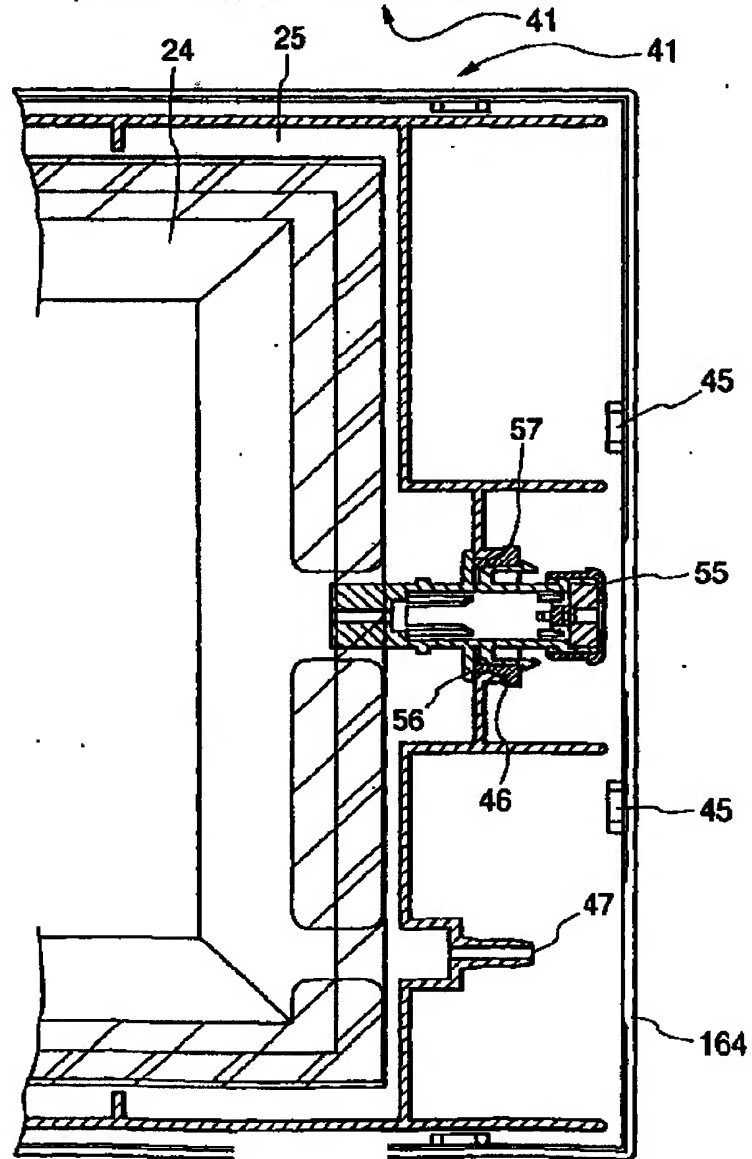


FIG. 8A

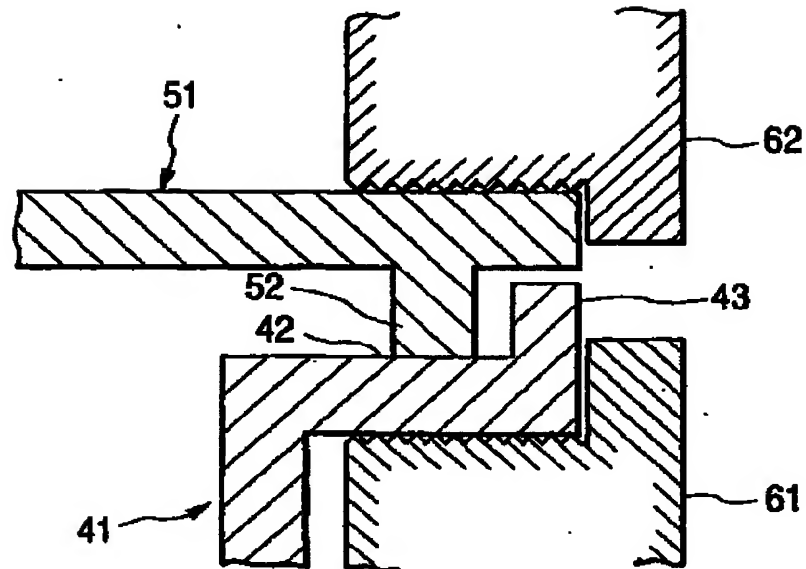


FIG. 8B

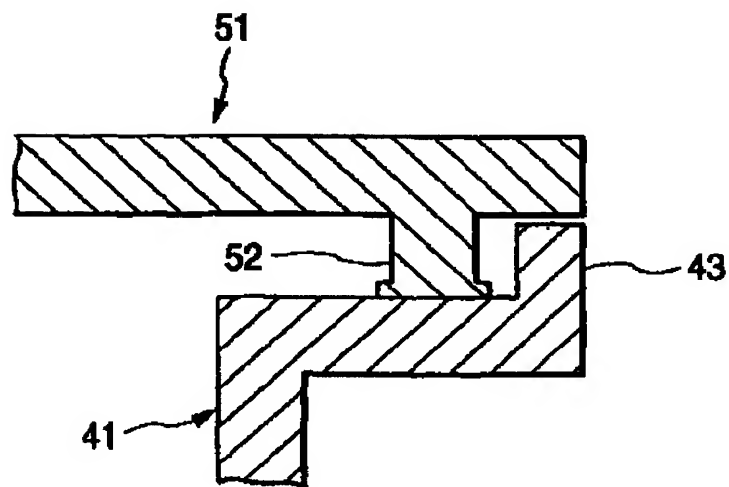


FIG. 9A

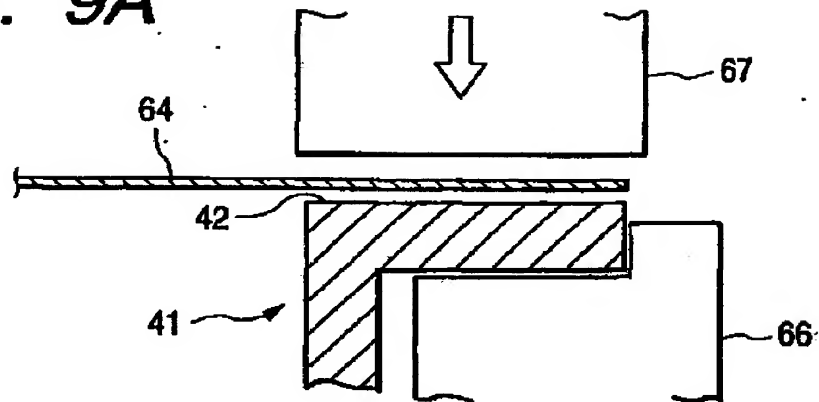


FIG. 9B

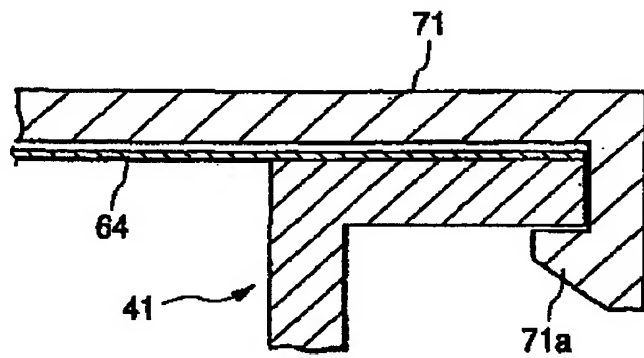


FIG. 10

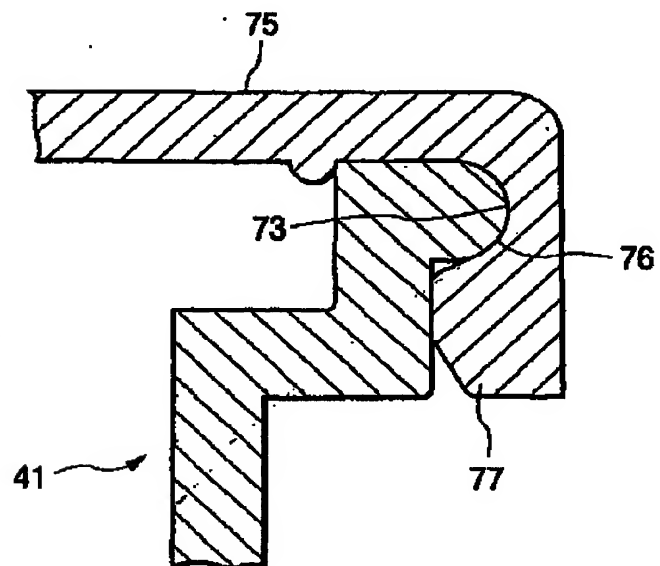


FIG. 11

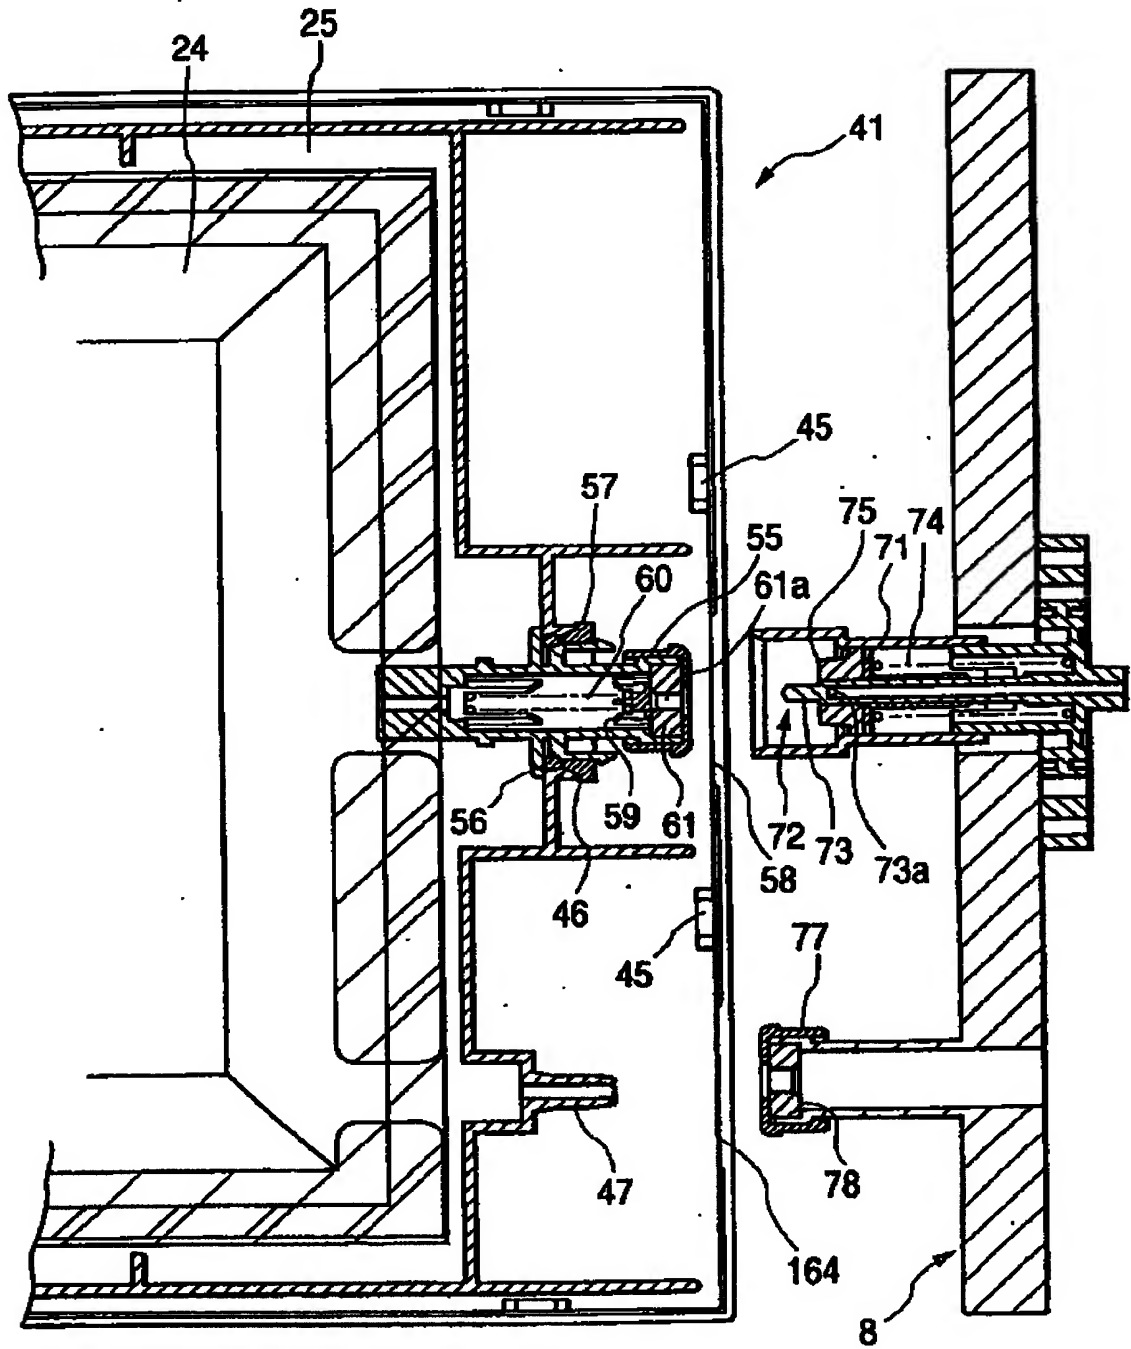
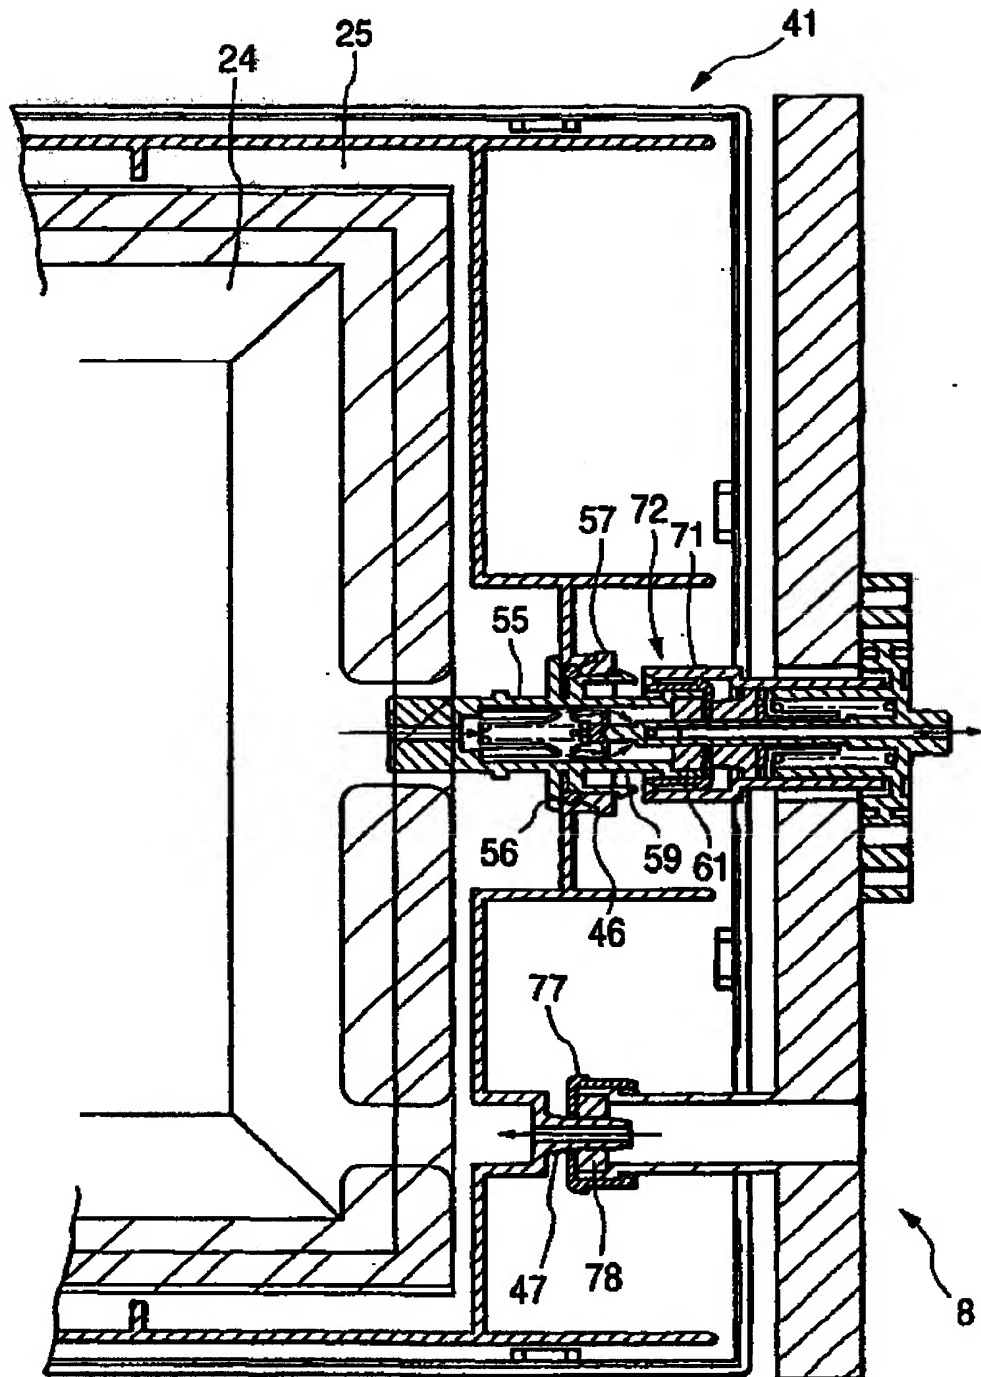
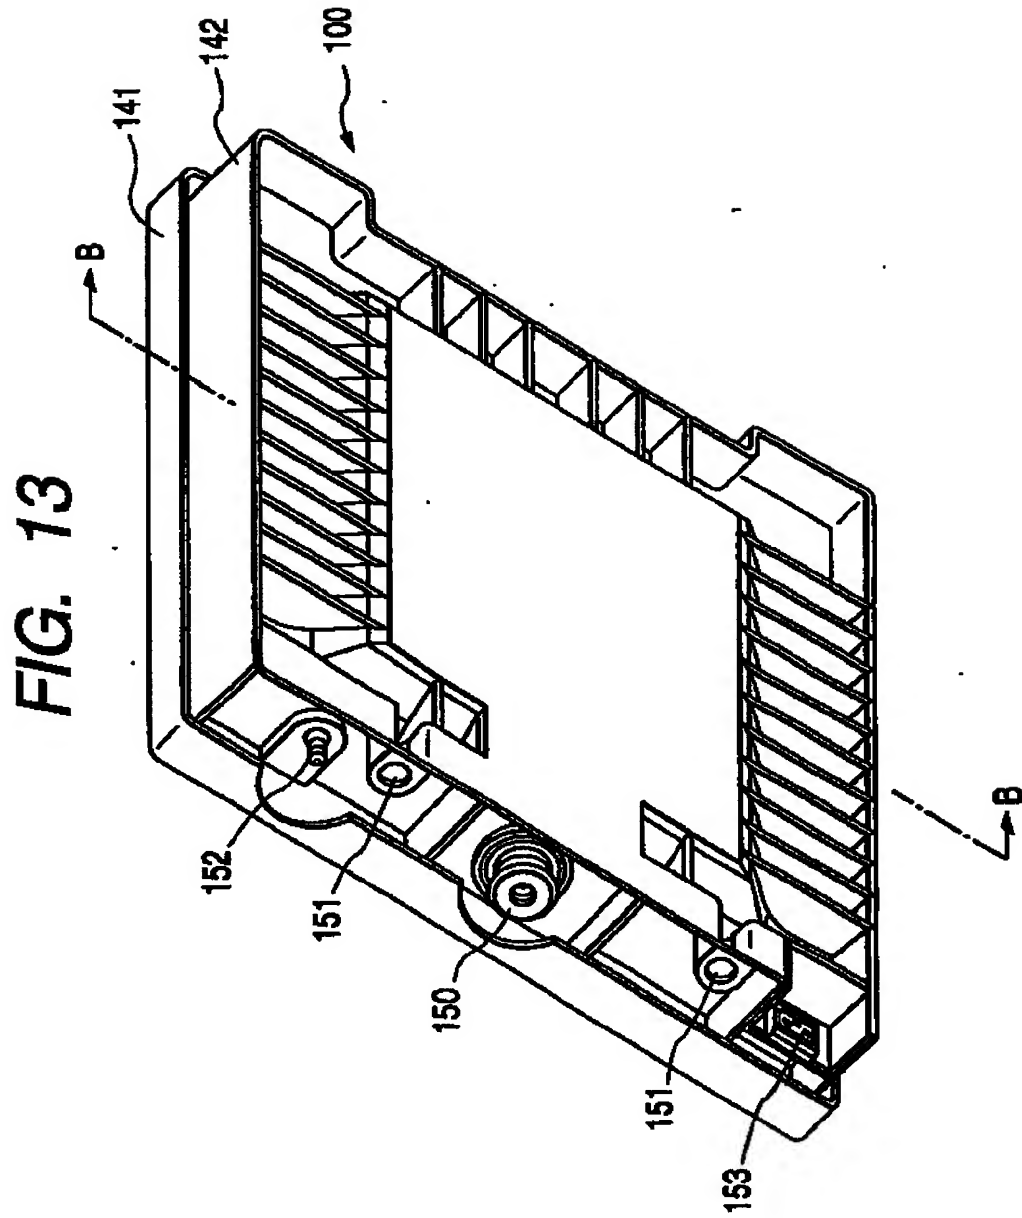


FIG. 12





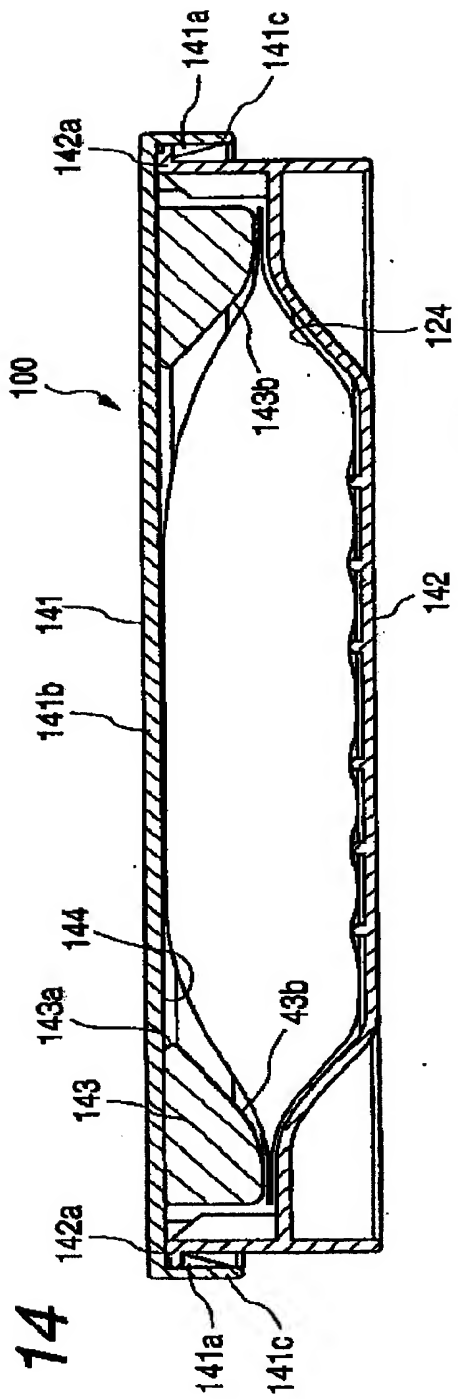


FIG. 14

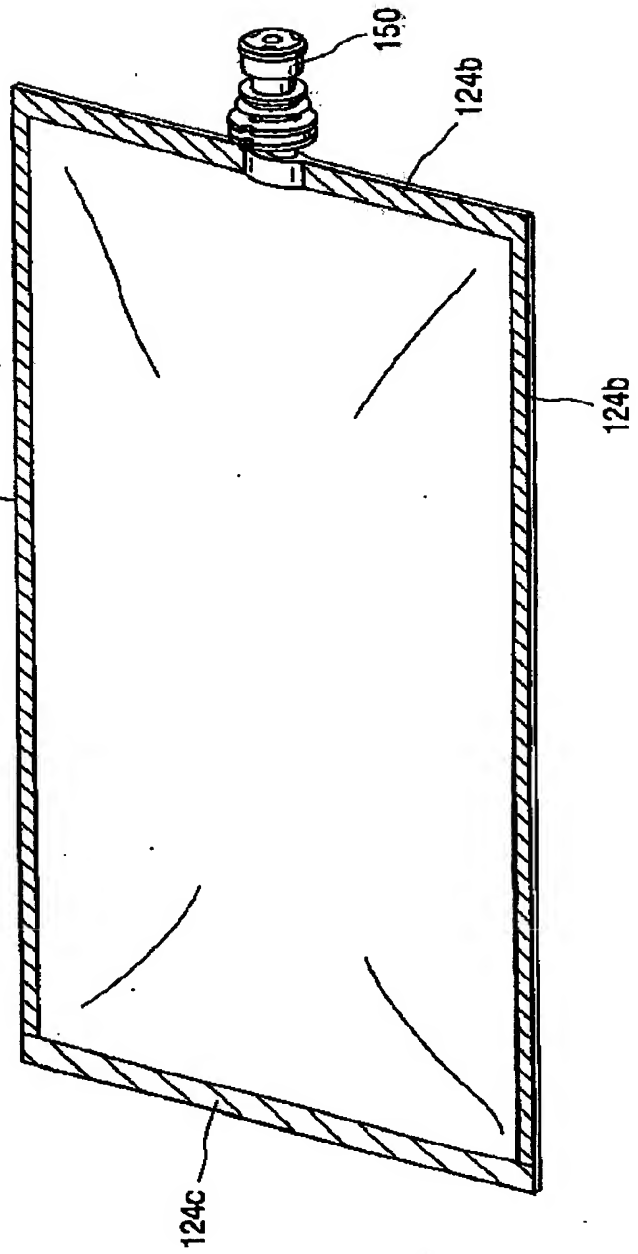


FIG. 15

FIG. 16

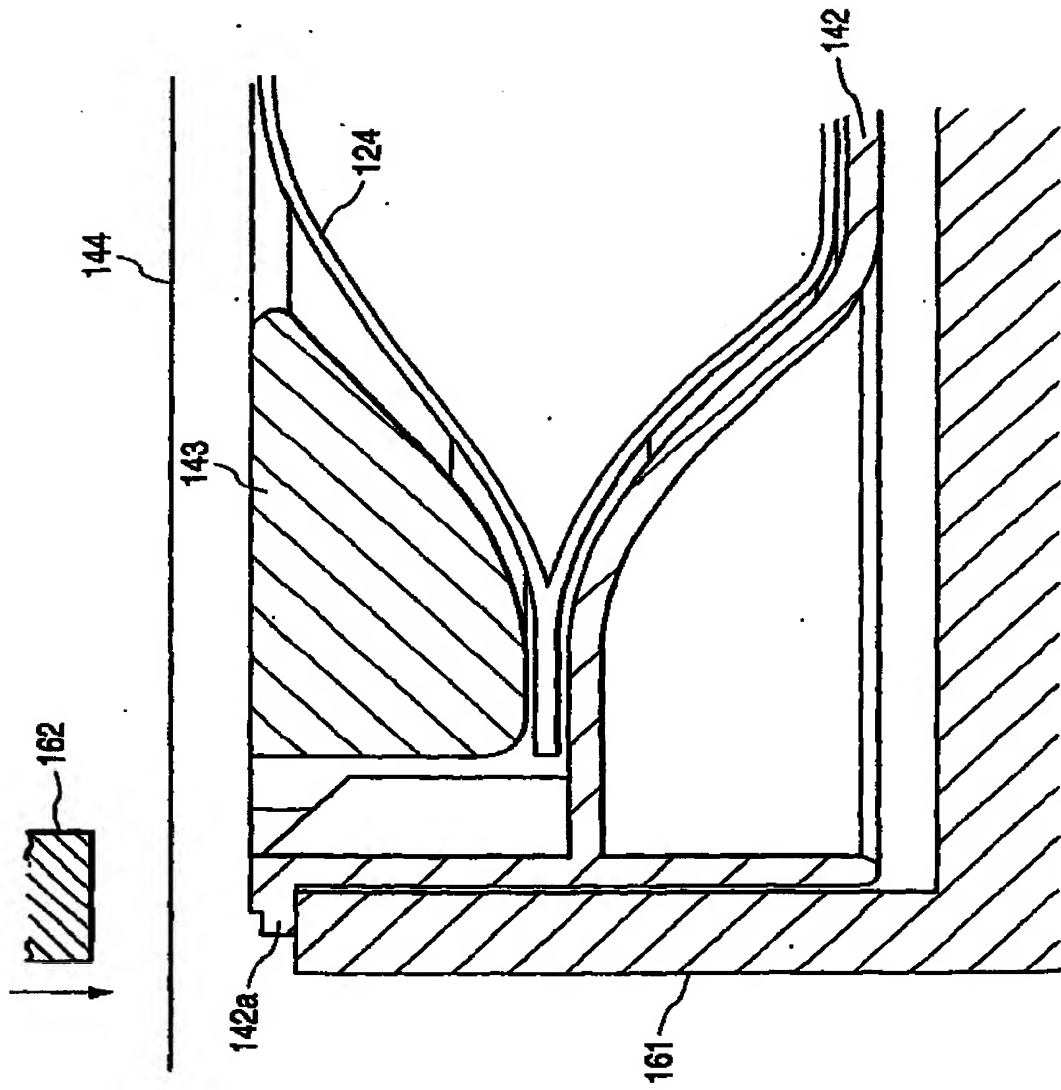


FIG. 17

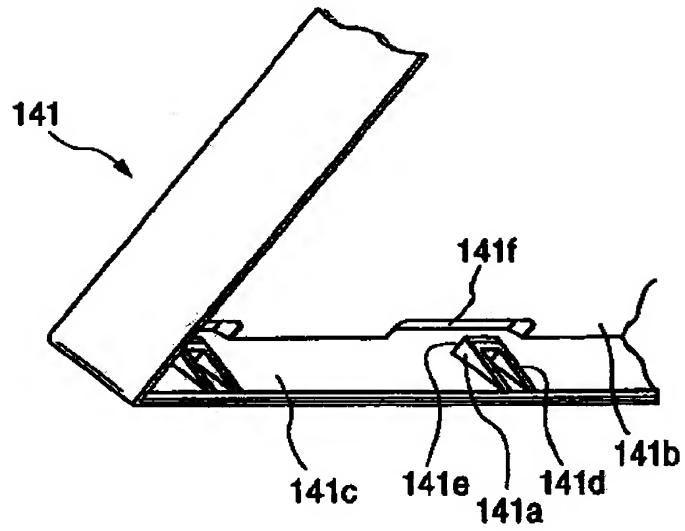


FIG. 18

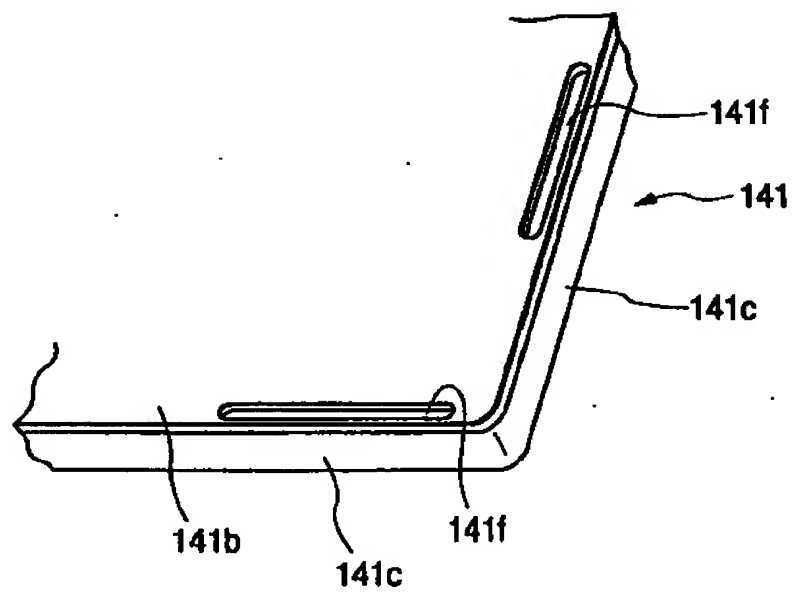


FIG. 19

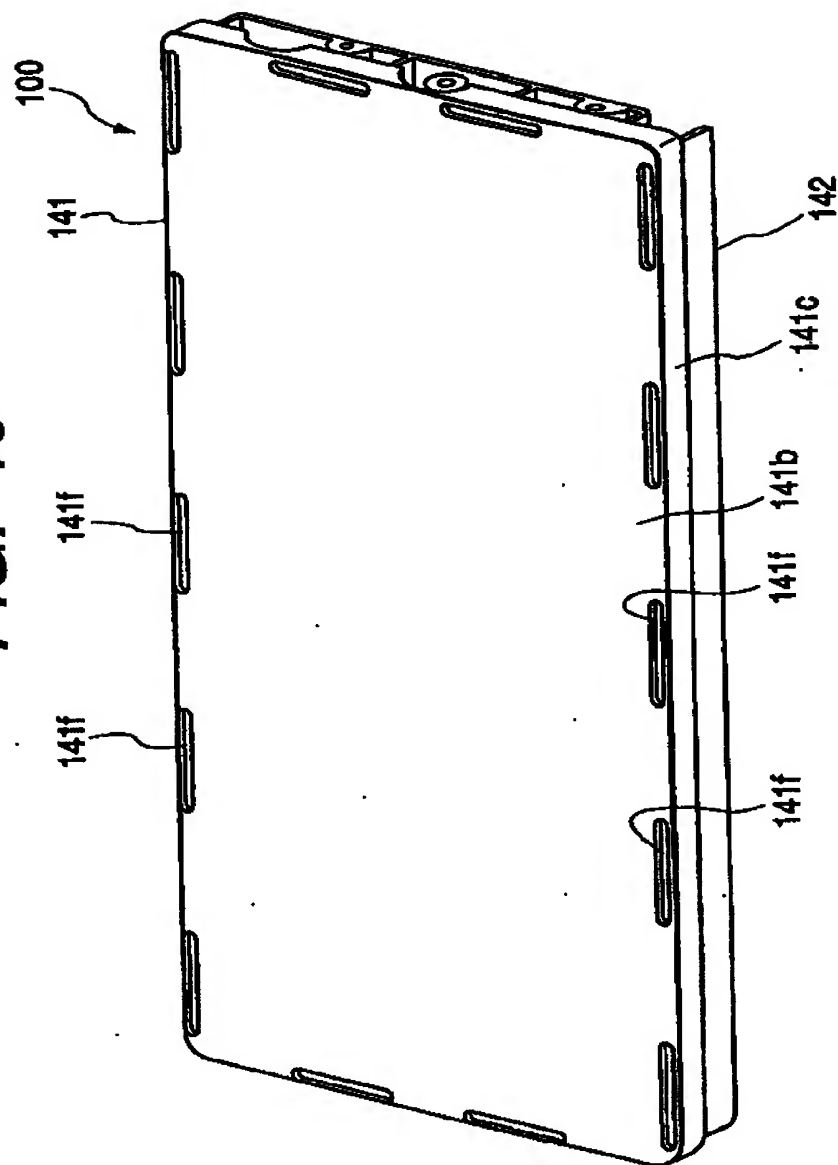


FIG. 20

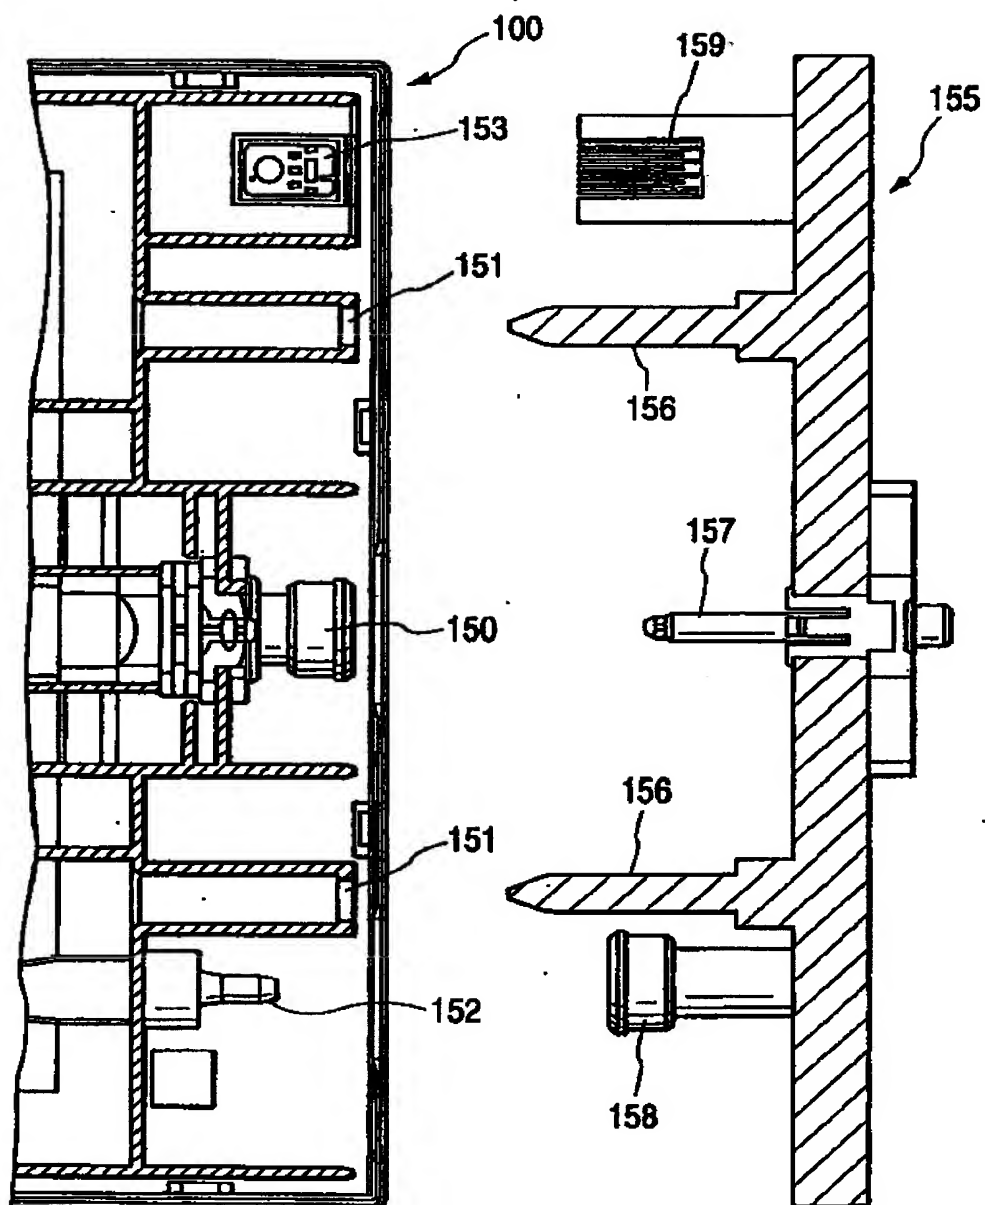


FIG. 21

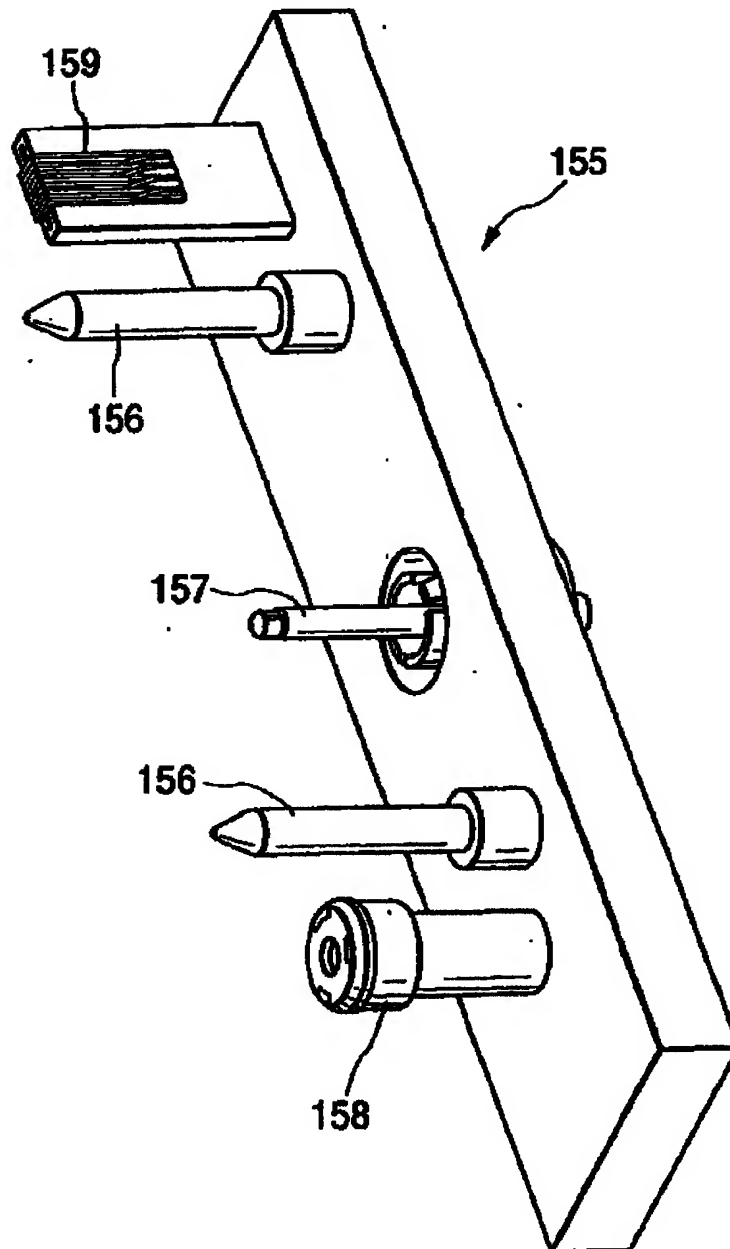


FIG. 22A

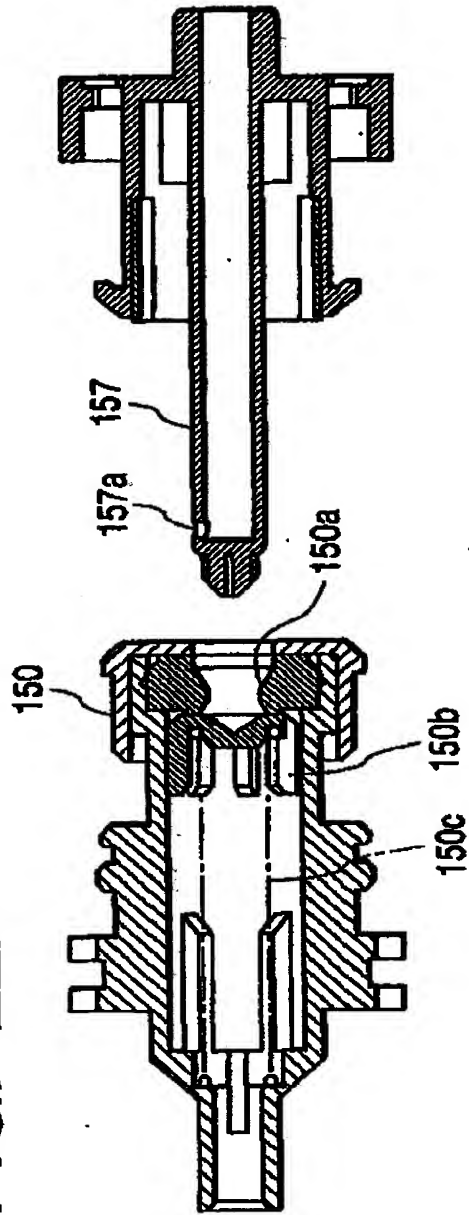


FIG. 22b

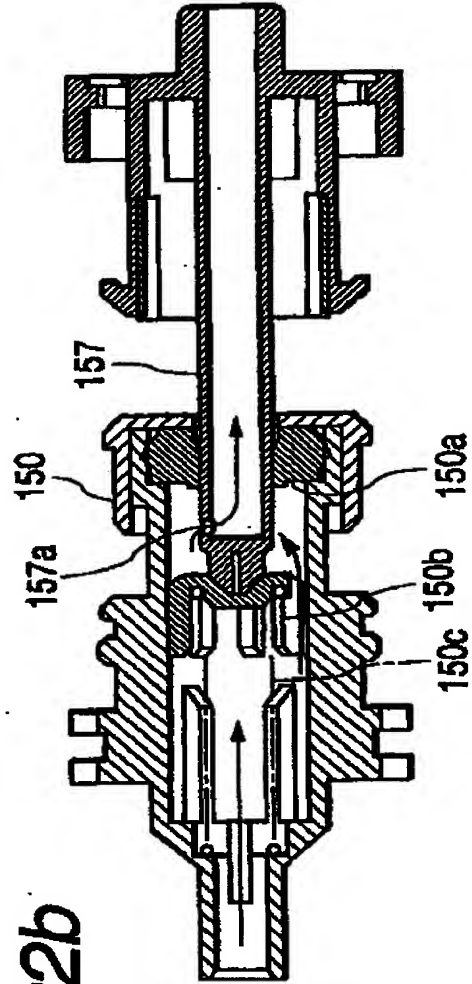


FIG. 23

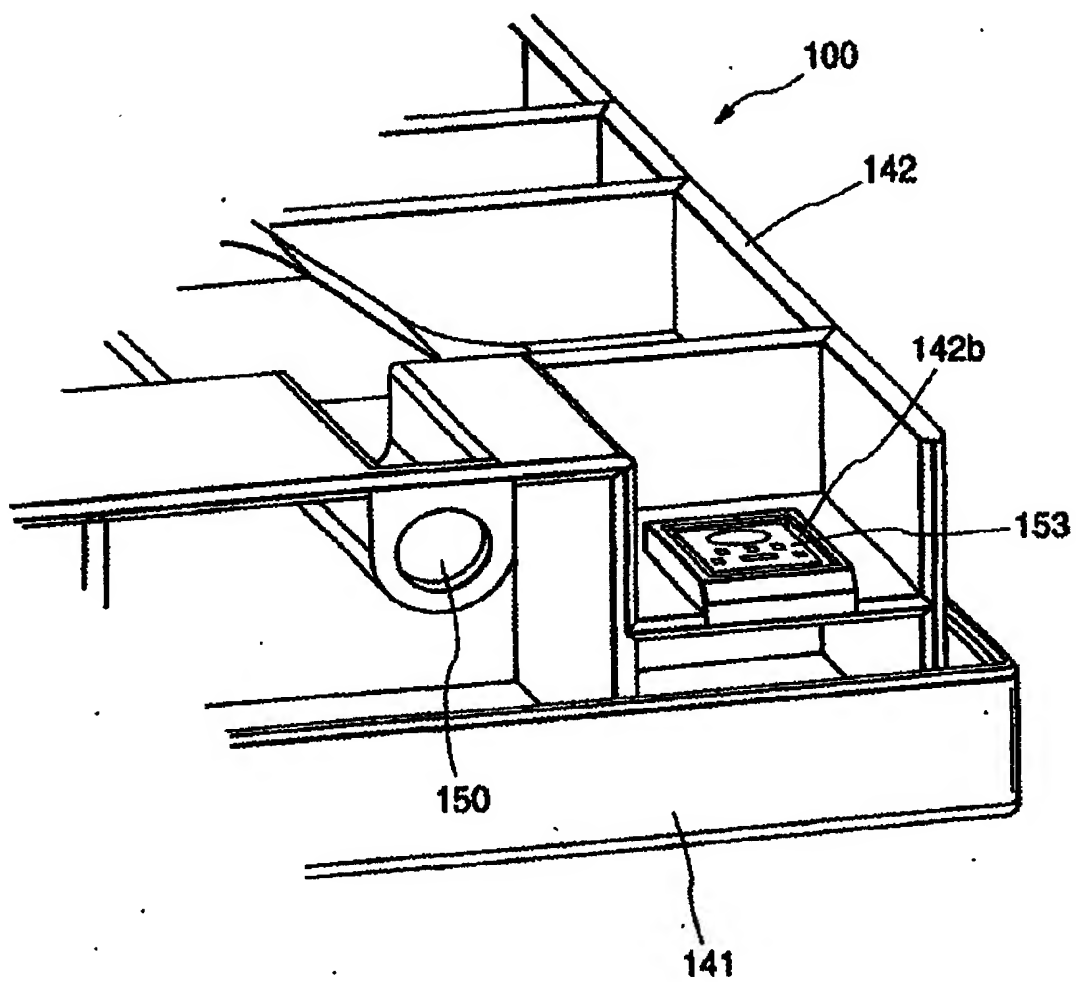


FIG. 24B

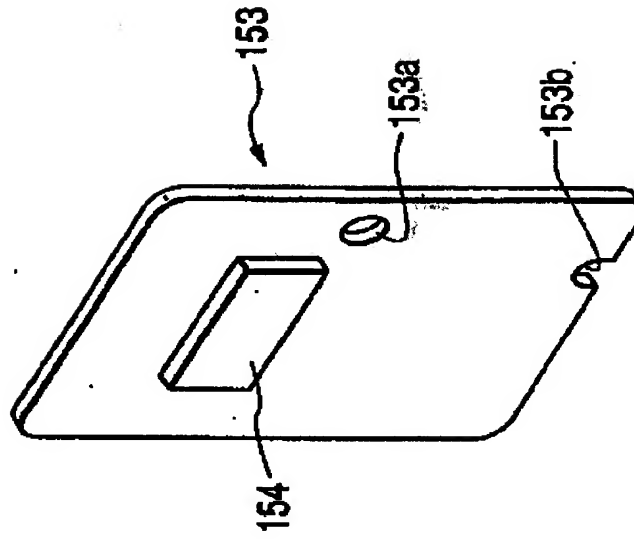


FIG. 24A

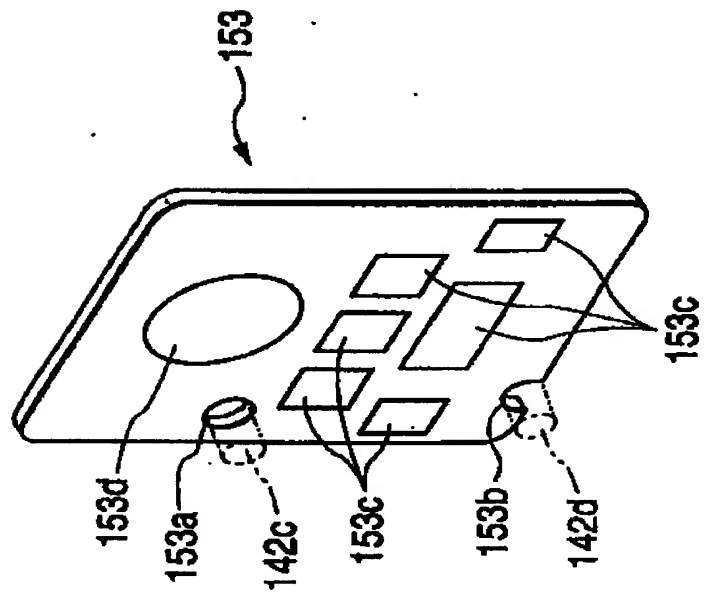


FIG. 25

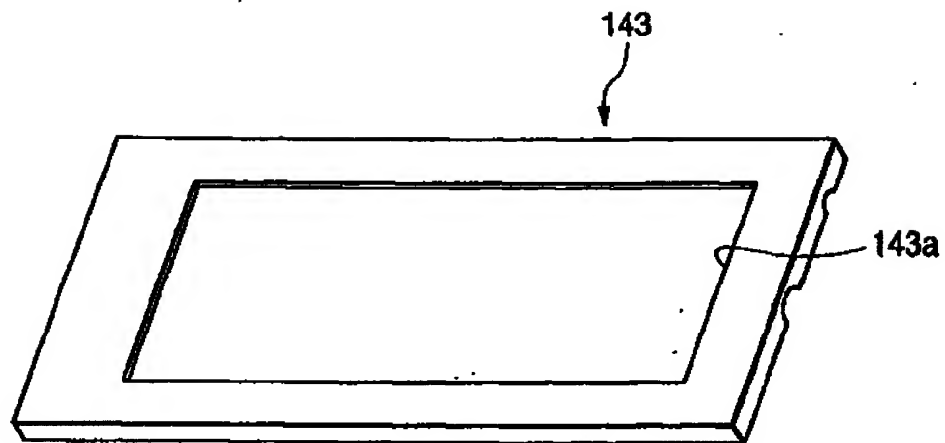


FIG. 26A

FIG. 26B


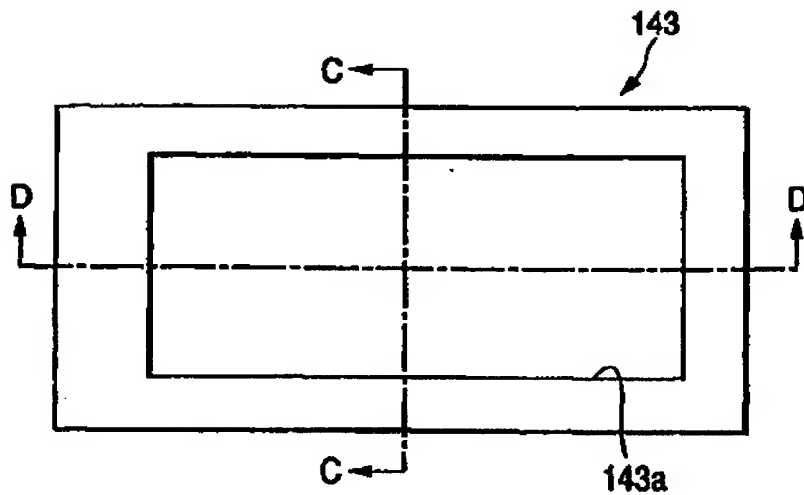


FIG. 26C




FIG. 27

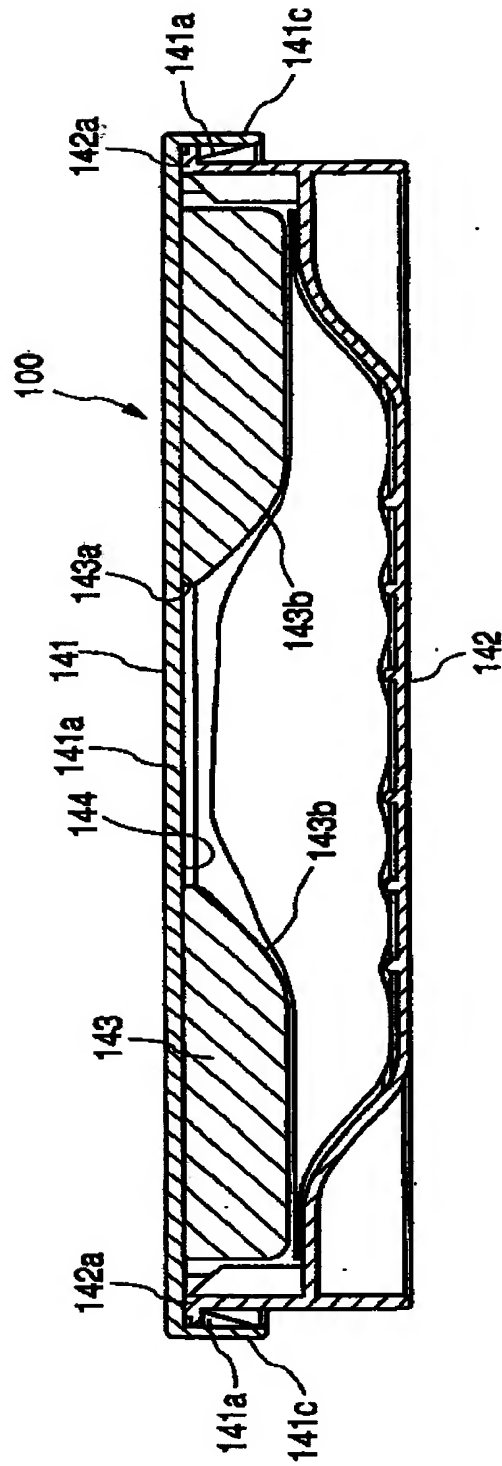


FIG. 28A

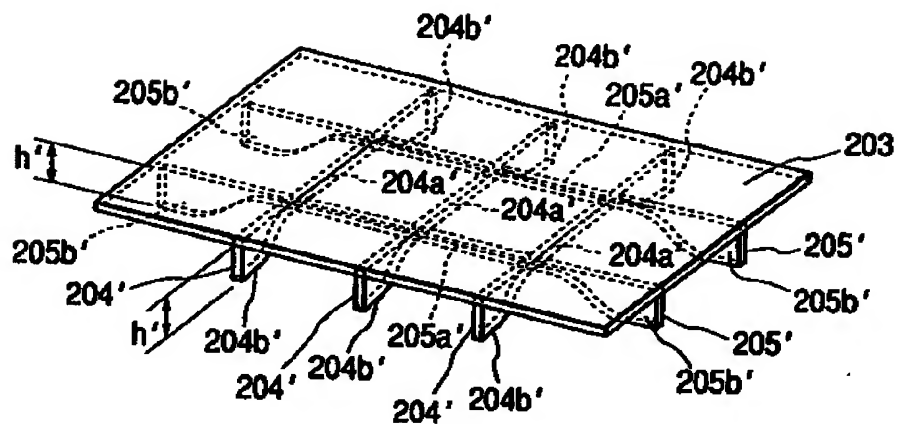


FIG. 28B

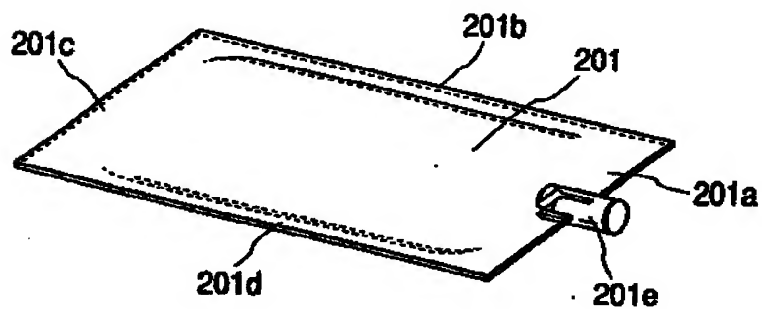


FIG. 28C

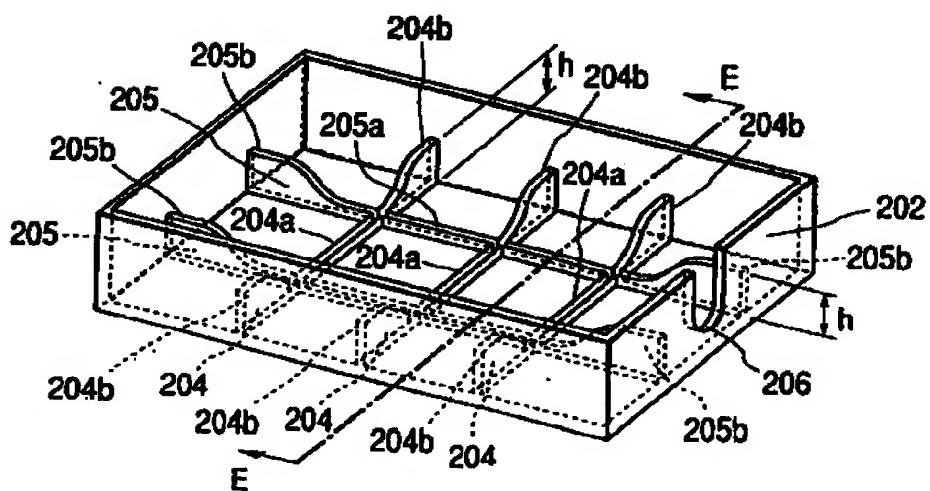


FIG. 29

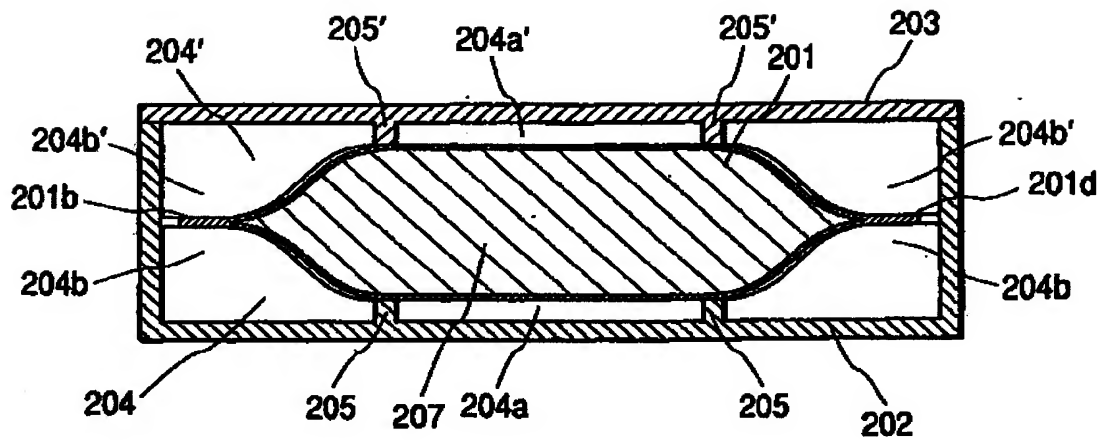


FIG. 30

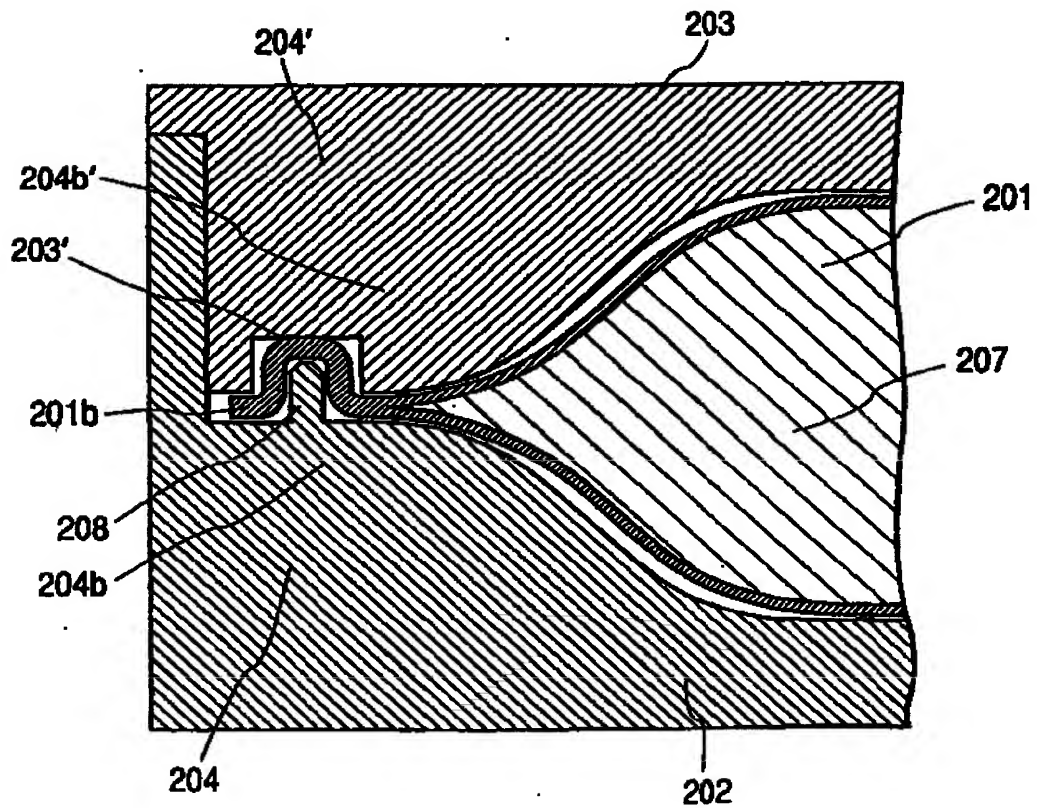


FIG. 31

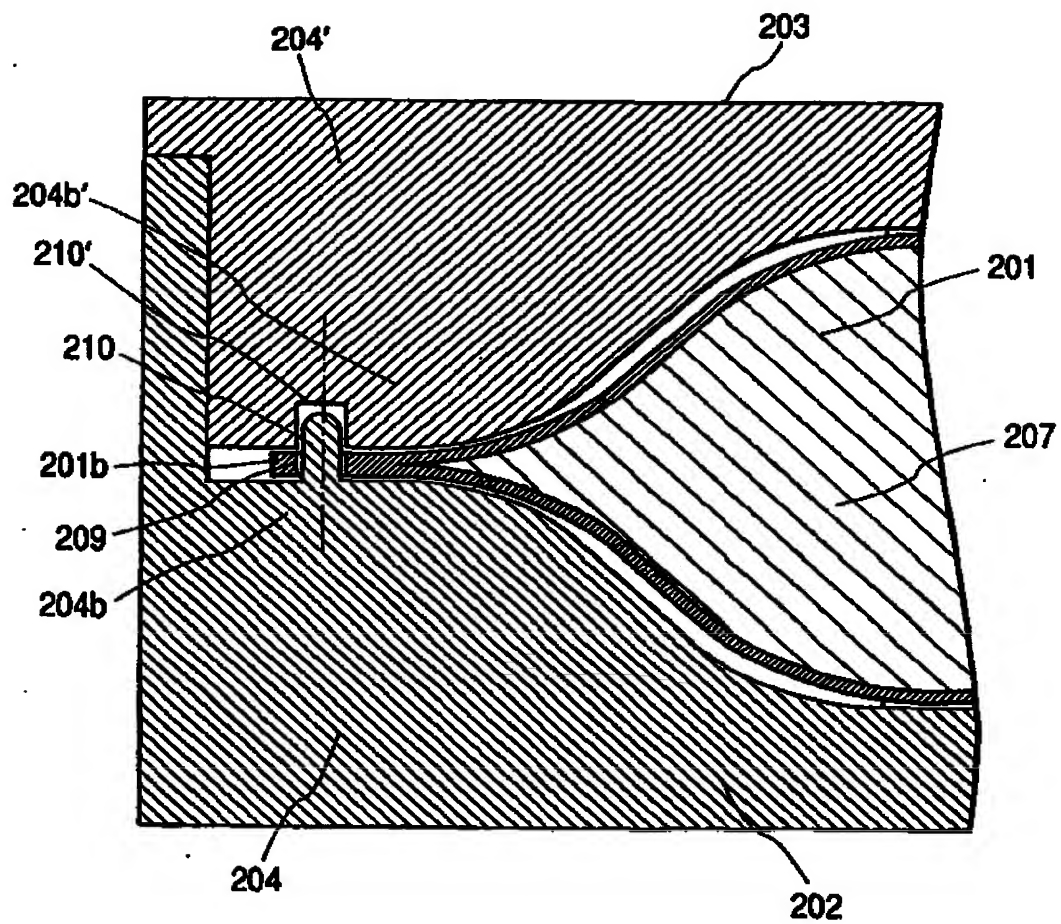


FIG. 32A

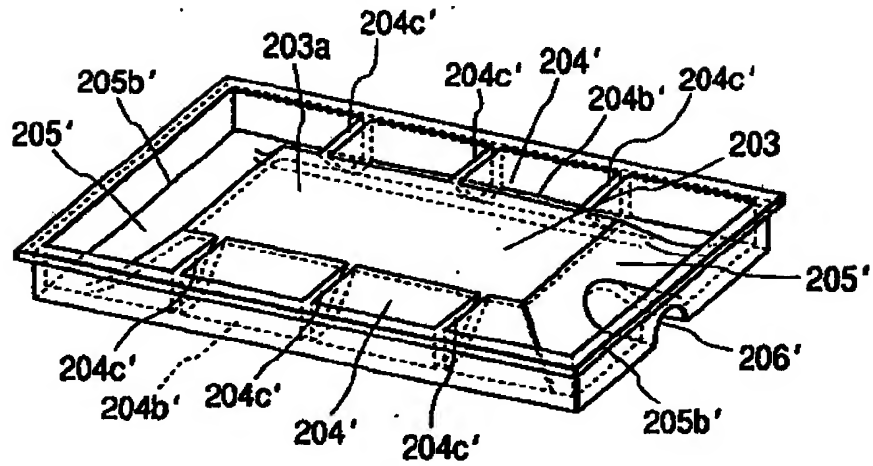


FIG. 32B

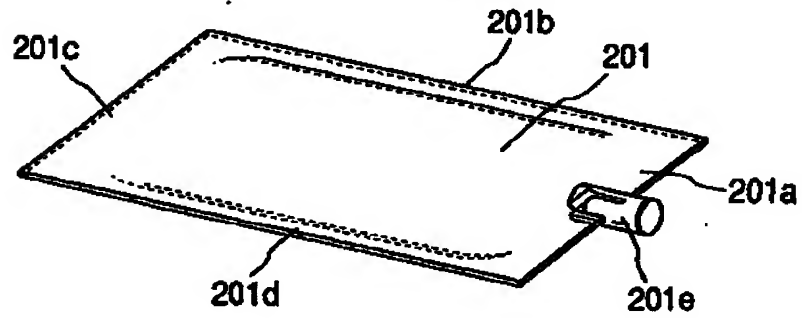


FIG. 32C

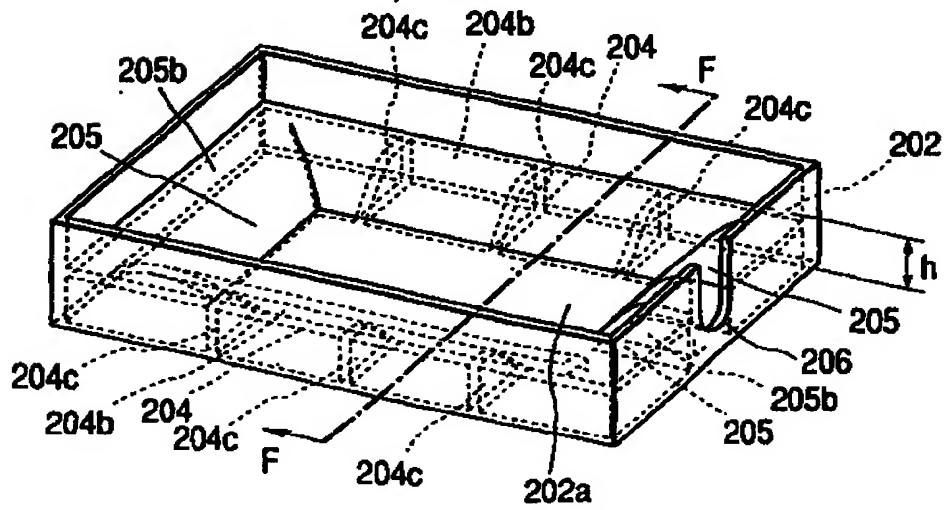


FIG. 33

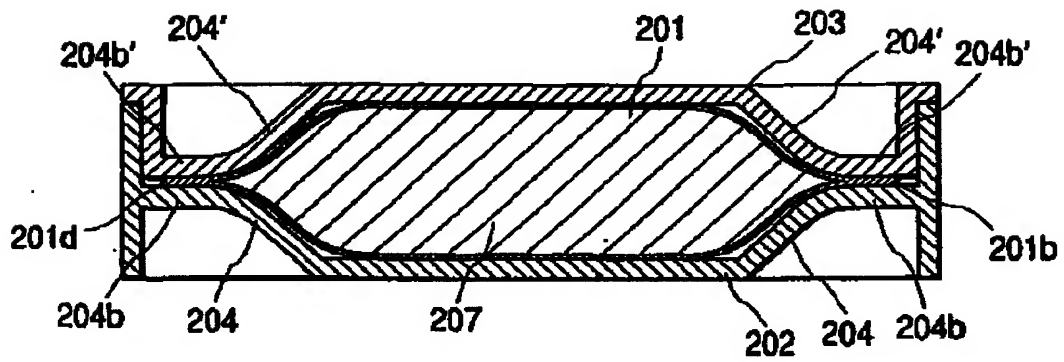


FIG. 34

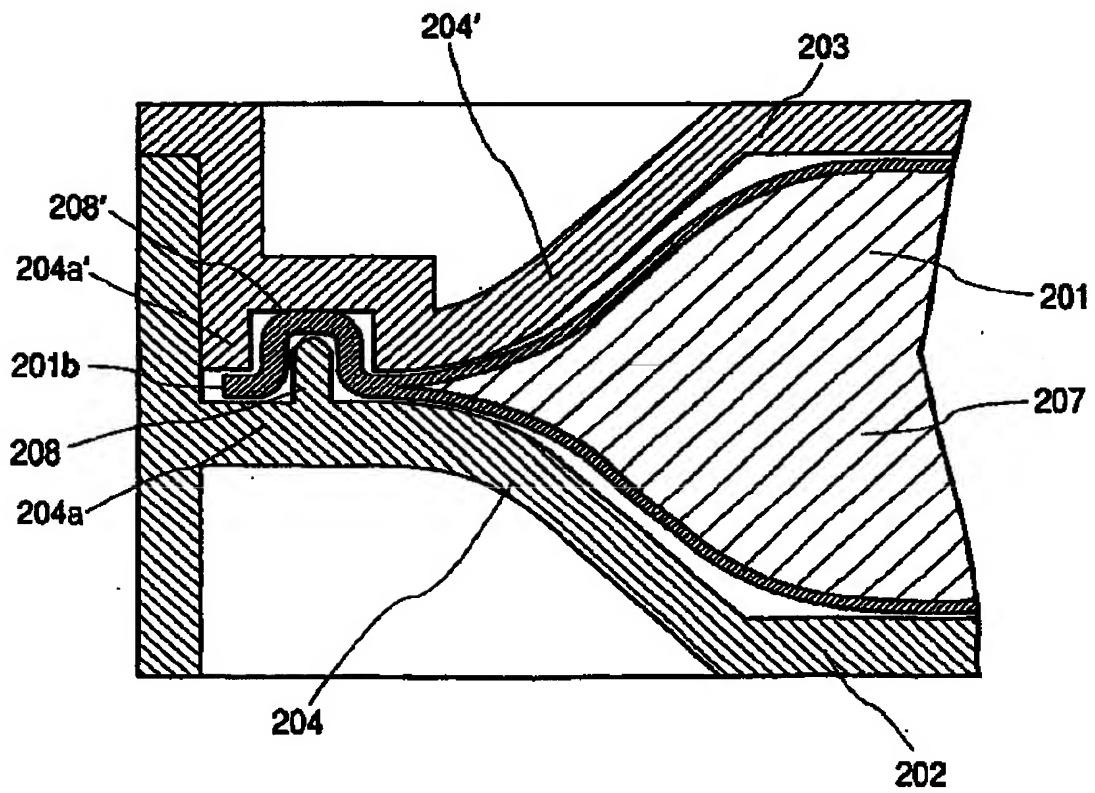


FIG. 35

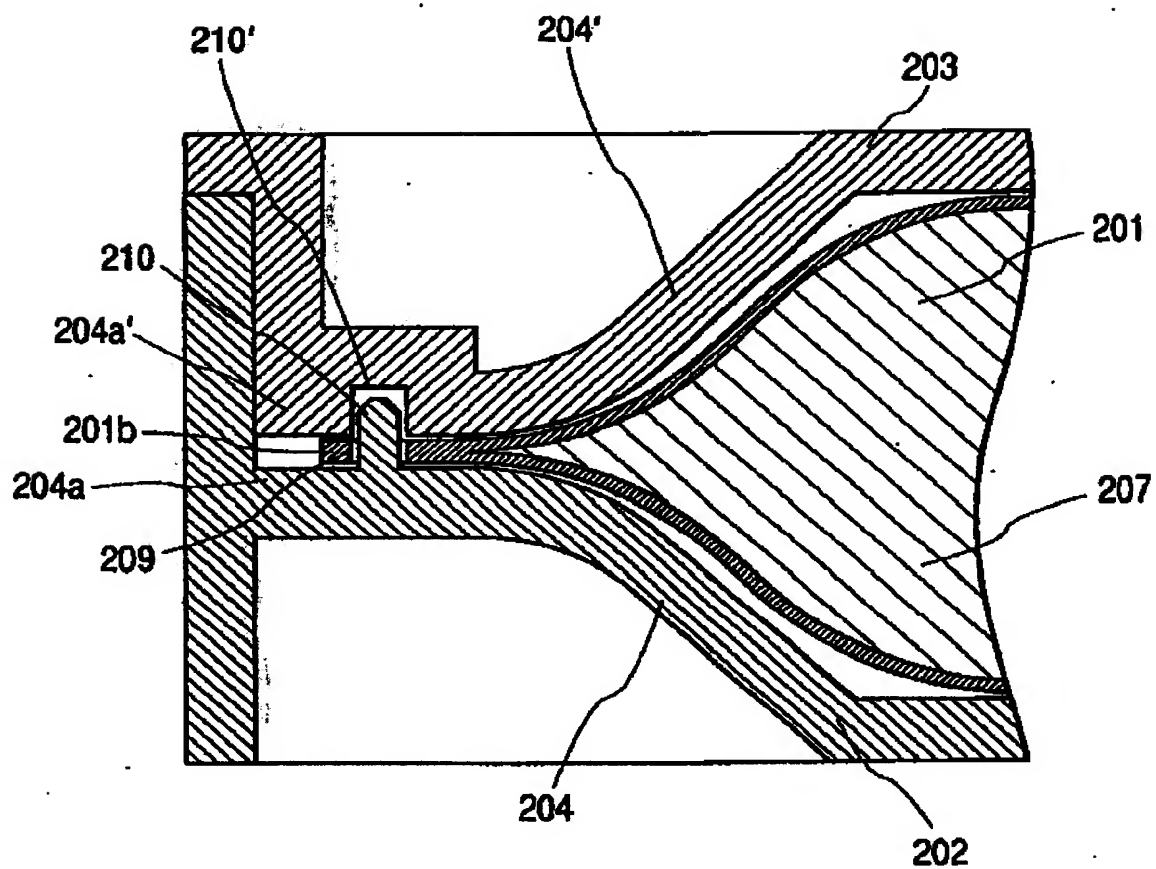


FIG. 36

